

## BODA PENDANT FITTING INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.


Please read them carefully before commencing work and retain them for future reference.

### SAFETY INFORMATION

- \* If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- \* This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations
- \* To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- \* To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- \* This fitting is Class 1 =  $\frac{1}{\text{I}}$  and should be fitted to a lighting supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker.
- \* Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- \* When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

### INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. If you are fitting this unit in place of an existing ceiling rose, you may find that there are more than 3 sets of cables connected within the rose. Before removing the existing rose, carefully note the position of each set of cables. If there are permanent live loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. **Fit the glasses:** Hold smaller glass inside the clear glass with the 3 holes at the top and roughly aligned. Fit the plastic bush onto each glass fixing holes in the glass. ① You may need to align the white glass to be able to see the screw hole. Fit the first screw pin Offer the glasses over the lampholder and insert the 3 threaded rods through the holes in the glasses. Screw the 3 rods into the sides of the lamp holders. ②
4. **Height adjustment:** Adjust height by moving the 'figure 8' shaped cable restraint along the cable as required then ensure cable restraint is resting on ceiling cup, tighten the plastic screw located on the ceiling cup, trim the wires as required and re-terminate wires into the terminal blocks.
5. Remove mounting bracket from the fitting and retain screws for later.
6. Using the fitting or mounting bracket as a template, mark and then drill the fixing holes in the ceiling ③ (ensure that the holes are drilled into a joist and not just the plaster).
7. Attach the mounting bracket onto the ceiling and **take care not to trap wiring in the process.**

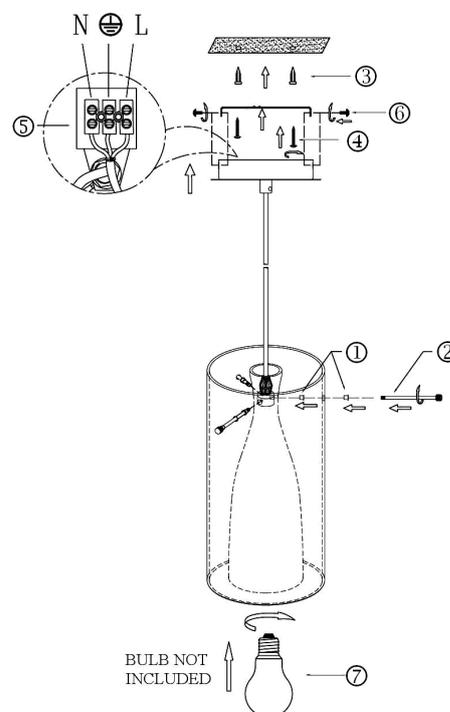

BULB NOT INCLUDED

- Note: no bracket is used for the 3 light pendant fitting as fitting is screwed directly to ceiling however the fixing holes should be prepared before hand as required.** ④
5. Weight of the fitting must be supported whilst you make the electrical connections as follows: ⑤  
 Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block.  
 Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.  
 Connect the supply earth (normally green/yellow or unsheathed) to earth (marked " $\frac{1}{\text{I}}$ ") on terminal block.  
**NOTE:** Ensure electrical connections are tight and no loose strands of wire are left out of the terminal block.
  6. Excess wires should be fitted into the ceiling cup or into ceiling void. Attach the fitting to the backplate on single pendant or directly to ceiling using the screws provided. ⑥ **Take care not to trap the wiring in the process.**
  7. Fit the bulb(s) type and wattage as indicated on the fitting. ⑦ **The wattage must not be exceeded.**
  8. Switch on the electricity supply at the fuse board.

### GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE

**Do not use polish or an abrasive cleaner - just a soft dry cloth.**