

IL4445

PLUG WALL LIGHT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.

Please read them carefully before commencing work and retain them for future reference.

SAFETY INFORMATION

- * The supply cable runs through the inside of the fitting. Take care not to place undue stress on the cable whilst unpacking to prevent the possibility of a poor connection.
- * If the external flexible cable of the lamp is damaged it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- * If you are in any doubt consult a person competent to give advice on the assembly of electrical equipment.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * To prevent electrocution switch off at the mains supply before assembling or maintaining this fitting. Ensure the plug is not connected to any power supply and read instructions before assembly.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Do not exceed wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of old bulbs carefully.


INSTALLATION

- 1. Ensure the house electricity supply is off at the fuse board.
- 2. If you are fitting this unit in place of an existing fitting, please ensure all existing wires are carefully isolated and are not to be connected to this fitting.
- 3. Remove the fixing bracket from the fitting and use this as a template, mark and then drill fixing holes in the wall. Ensure the holes are drilled into the joist or other suitable mounting and not just into plaster.
- 4. Attach the fixing bracket onto the wall using suitable fixings.
- Offer the fitting onto fixing bracket and push firmly onto the wall then secure into position using screws at the sided.
 Take care not to over tighten fixing screws.
- 6. Fit the shade, remove shade ring from lampholder, fit the shade then secure shade with the ring. **Take care not to overtighten.**

7. SHADE ANGLE ADJUSTMENT:

Loosen the winged nut at the end of the stem enough to allow angle to be altered, adjust as required. Lock shade into position using the winged nut, **take care not to overtighten.**

8. Your lamp is now ready for use.

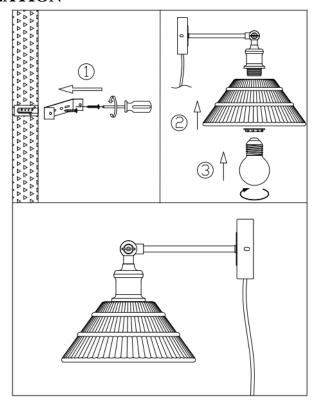

GENERAL INFORMATION

This product is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**

To register your product for an extended five-year warranty, please complete the simple form at

www.darlighting.co.uk/warranty

You'll need to fill in the details of the product, the retailer you purchased it from, and also the installer and the installation. Please also upload a clear copy of the original purchase invoice or receipt to complete this registration.

UK: där Lighting Ltd, Wildmere Road, Banbury, Oxon, OX16 3JZ

Ireland & EU: Dar Lighting Ireland Limited, Suite 108, Q House, 76 Furze Road, Sandyford Industrial Estate, Dublin 18