


OPUS R7s HALOGEN UP LIGHTER

ASSEMBLY INSTRUCTIONS

These instructions are provided for your safety.

Please read carefully before commencing work and retain for future reference.


SAFETY INFORMATION

- * The supply cable runs through the inside of the floor stand, take care not to place undue stress on the cable whilst unpacking to prevent the possibility of a poor connection.
- * If you are in any doubt consult a person competent to give advice on the assembly of electrical equipment.
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting.
- * The product should be positioned so the bulb is no closer than 50cm from the surface it is illuminating = (0.5m)
- * Always replace the pyrex glass shield if broken. 
- * If the external flexible cable of the lamp is damaged it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- * When changing the bulb, always unplug at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

ASSEMBLY INSTRUCTIONS

1. Unpack the product and remove all packaging. Take care not scratch the surface of the poles whilst removing the plastic wrapping. Ensure the ends of the poles or the plug do not scratch base.
2. Lay product out on the floor, having previously covered it with a soft cloth to avoid damage to the flooring and product finish. Assembly should take place with the product lying flat.
3. It may be necessary to remove protective packaging (plastic / cardboard) located at cable entry points of the product. ①
4. Fully insert the Y-shaped, top section into the two sockets on the underside of the lighting tray. ② Secure in position by tightening the grub screws on each socket. ③
5. Screw the upper pole onto the lamp holder section, ④ taking care to hold the pole parallel to avoid cross threading. Hold the lamp holder section still and only turn the pole to avoid twisting the cable.
6. Screw the lower pole onto the upper pole. ⑤ To prevent the cable twisting, hold the top section still and only rotate the lower pole.
7. Gently pull excess cable out through centre of the base until the lower pole meets the base.
8. Turn the base onto the bottom pole, ⑥ keeping the pole parallel to avoid cross threading. Keep the pole stationary and only rotate the base.
9. Pull any excess cable out through the cable grip on the side of the base. Secure the cable by tightening the grub screw on the cable grip. ⑦ Take care not to over tighten the grub screw and damage the cable.
10. Ensure all the assembled parts are fully tightened and up lighter is level.
11. Stand the floor lamp upright. Fit the bulb in the head ⑧ (read note below on bulb care and replacement). Fit the protective Pyrex glass shield by sliding into place ⑨ and securing with the clips provided.
12. Your up lighter is now ready for use.

To replace either bulb: Unplug the floor lamp first and allow bulbs to cool for at least 5 minutes. Unscrew the pyrex glass shield and remove old bulb. Take care not to touch the replacement bulb with the fingers as this will leave a residue of grease, which will burn and reduce the life of the bulb. If at any time your fingers touch it, it should be cleaned with a soft cloth dampened with alcohol. Replace bulb shield.

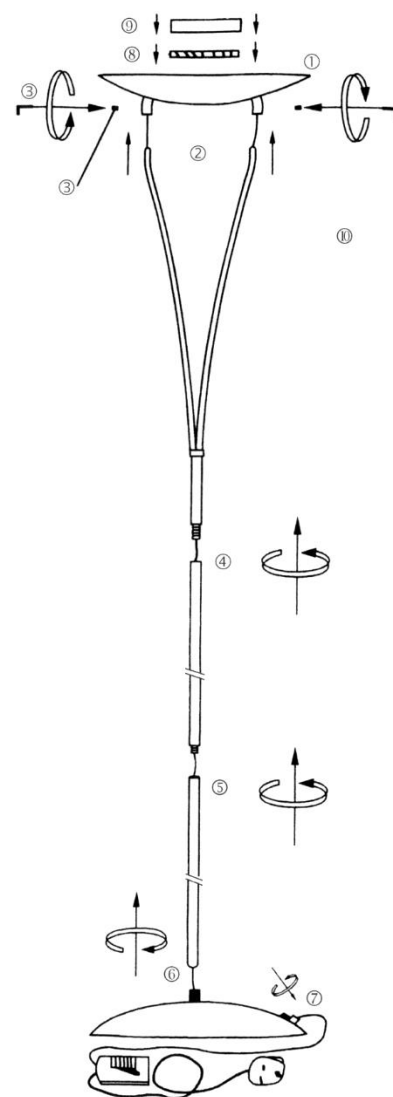



IL2782

GENERAL INFORMATION

This product is designed for internal use only. **Do not use polish or abrasive cleaner – just a soft dry cloth.**

To register your product for an extended five-year warranty, please complete the simple form at

www.darlighting.co.uk/warranty

You'll need to fill in the details of the product, the retailer you purchased it from, and also the installer and the installation. Please also upload a clear copy of the original purchase invoice or receipt to complete this registration.

UK: *där Lighting Ltd, Wildmere Road, Banbury, Oxon, OX16 3JZ*

Ireland & EU: *Dar Lighting Ireland Limited, Suite 108, Q House, 76 Furze Road, Sandyford Industrial Estate, Dublin 18*