



IL1854

CURVED OPAL GLASS WALL LIGHT INSTALLATION INSTRUCTIONS

These instructions are provided for your safety.


Please read carefully before commencing work and retain for future reference.

SAFETY INFORMATION

- * If you are in any doubt consult a person competent to give advice on the installation of electrical equipment.
- * This fitting should be fitted in accordance with IEE Wiring Regulations and the Building Regulations
- * To prevent electrocution switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- * To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- * This fitting is Class I = $\frac{1}{\text{I}}$ and should be fitted to a lighting supply (with earth) protected by a 5 amp fuse or equivalent circuit breaker
- * Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- * When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

INSTALLATION

1. Ensure the house electricity supply is off at the fuse board.
2. Before removing the existing fitting, carefully note the position of each set of cables. If there are loop in cables that are not connected to the light these must be terminated in a separate terminal block not connected to the fitting.
3. Carefully unpack the component parts and lay these out on a clear covered surface.
4. Offer large curved glass over back plate then secure into position with thumb screws provided, finger tight only. Rubber washers fitted both sides of glass. ①
5. Offer smaller curved glass over back plate then secure into position with thumb screws provided, finger tight only. Rubber washers fitted both sides of glass. ②
6. Offer small curved cup onto back plate whilst making sure the threaded posts fit through the holes then secure into position from the rear with thumb nuts provided. Rubber washers fitted on screw. ③
7. Using the mounting bracket as a template, mark and drill fixing holes in the wall. Ensure the holes are drilled into a solid wall or other suitable mounting and not just into plaster. ④
8. Make the connections as follows: Weight of the fitting must be supported while you make the connections. ⑤
 Connect the supply live (normally brown or red) to fitting live (marked "L") on the terminal block.
 Connect the supply neutral (normally blue or black) to fitting neutral (marked "N") on the terminal block.
 Connect the supply earth (normally green/yellow or unsheathed) to earth (marked " $\frac{1}{\text{I}}$ ") on terminal block.
 Ensure electrical connections are tight and no loose strands of wire protrude from the terminal block then close connector block cover by snapping back together
9. Offer fitting up to the mounting bracket and align the screw holes. Replace the screws removed earlier and tighten. ⑥ **Take care not to damage wiring.**
10. Fit the bulb, type and wattage as indicated on the wall light. ⑦ **The wattage indicated must not be exceeded.**
11. Switch on the electricity supply at the fuse board.

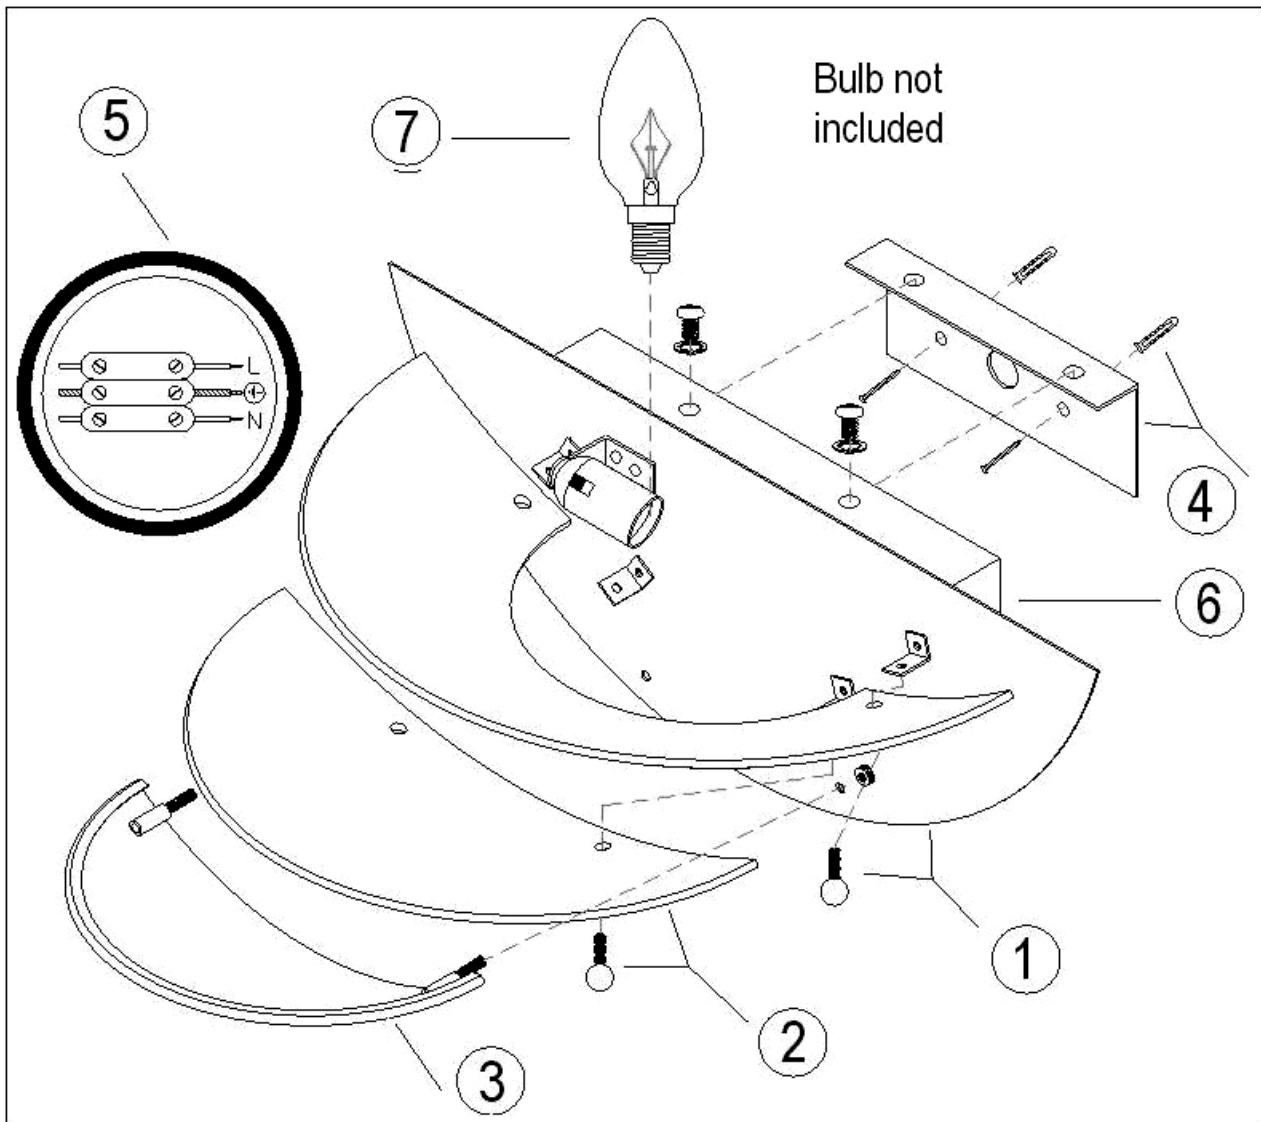

GENERAL INFORMATION

This fitting is designed for internal use only and must be fitted to a DRY SURFACE as any dampness in plaster or paint can damage the finish. **Do not use polish or abrasive cleaner - just a soft dry cloth.**

To register a product for an extended five-year warranty, please complete the simple form at <https://www.darlighting.co.uk/blog/warranty-registration/> with the retailer, product and installers and installation details and upload a clear copy of the original purchase invoice/receipt.

UK: Dar lighting ltd, Wildmere Road, Banbury, Oxon, OX16 3JZ

IRELAND & EU: Dar Lighting Ireland Limited, Suite 108, Q House, 76 Furze Road, Sandyford Industrial Estate, Dublin 18