


# Path

## General info

### Outdoor - Floor

Outdoor ground mounted bollard with integrated LED sources and direct light emission

<b>Ean</b>	8021696250816
<b>Item</b>	PATH PT ROUND 4000K
<b>Installation</b>	Floor
<b>Guarantee</b>	5 years
<b>Gross weight</b>	2.39 kg
<b>Volume</b>	0.023826 m <sup>3</sup>

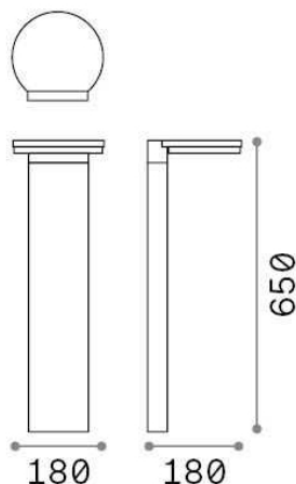

## Technical info

<b>Net weight</b>	1.9 kg
<b>Insulation class</b>	I
<b>Protection index</b>	IP65
<b>Operating temperature</b>	-15° ~ +45 °C
<b>Dimmer</b>	Non-dimmable, On-Off
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included
	YES (by qualified operators only), electronic
<b>Load resistance</b>	IK08

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Repleaceable source</b>	NO
<b>Power</b>	LED 10W
<b>Emission</b>	Direct
<b>Max consuption</b>	max 10 W
<b>Features LED</b>	LED SMD
<b>CCT</b>	4000 K
<b>Duration LED (t. 25°C)</b>	20000 h
<b>CRI</b>	> 80
<b>SDCM</b>	3
<b>Light beam</b>	105°
<b>Light beam flux</b>	1250 lm
<b>Useful light flux</b>	1030 lm
<b>Standby power</b>	< 0.50