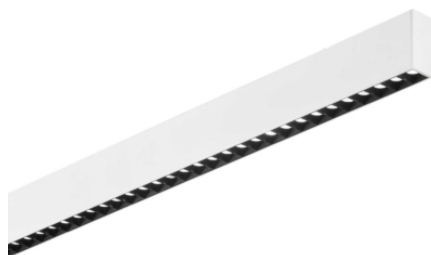# ideal lux.

General info

### Technical - Linear system

Indoor ceiling mounted linear fitting with multiple integrated LED sources and direct/indirect light emission

Ean	8021696267159
Item	STEEL ACCENT WH 4000K
Installation	Ceiling
Guarantee	5 years
Gross weight	2.47 kg
Volume	0.017817 m³

Technical info

Net weight	1.98 kg
Insulation class	I
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
	YES (by qualified operators only), electronic, osram

Source info

Integrated source	Integrated LED module
Repleaceable source	YES (by qualified operators only)
Power	36W
Emission	Direct + Indirect
Max consuption	max 36 W
Features LED	LED SMD SAMSUNG
CCT	4000 K
Duration LED (t. 25°c)	50000 h
CRI	> 90
SDCM	3
Light beam	60+110°
UGR Maximum	< 16
Light beam flux	3200 lm
Useful light flux	3900 lm
Standby power	< 0.50

1070   35