




RENA Aluminium inground lighting fixture. Aluminium cover. (max. 1000Kg). Opal polycarbonate. IP68(1m).

Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Version	Dimmable
1630	6W max.,	LED GU10	-	-	-	-	Round	-
1631	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Round	Dim. Triac
1632	6W max.,	LED GU10	-	-	-	-	Square	-
1633	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Square	Dim. Triac

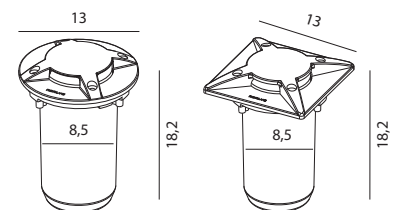

Art. 1630
Art. 1631


Art. 1632
Art. 1633

Polypropylene box for installation included.

Standard with 3 m cable, one cable gland.


Art 1630 and 1632:
Supplied without bulb.

Art. 1631 and 1633:
5,5W GU10, 375lm, 3000K, 36D LED bulb included





RENA




RENA Aluminium in-ground lighting fixture. Stainless steel 316L cover ring. Tempered safety glass (max. 2000Kg).

Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Version	Glass	Dimmable
1550	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Round	Clear glass	Dim. Triac
1552	6W max.,	LED GU10	-	-	-	A+..D	Round	Clear glass	-
1554	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Round	Frosted glass	Dim. Triac
1556	6W max.,	LED GU10	-	-	-	A+..D	Round	Frosted glass	-
1551	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Square	Clear glass	Dim. Triac
1553	6W max.,	LED GU10	-	-	-	A+..D	Square	Clear glass	-
1555	5,5W	LED GU10	375 lm	3000K	40 000h	A+	Square	Frosted glass	Dim. Triac
1557	6W max.,	LED GU10	-	-	-	A+..D	Square	Frosted glass	-


Polypropylene box for installation included.
Standard with 3 m cable, one cable gland.

Rena Art. 1550, 1551, 1554, 1555:
5,5W GU10, 375lm, 3000K, 36D LED bulb included

Art. 1552, 1553, 1556, 1557:
Supplied without bulb.



Art. 1550, 1552
Art. 1554, 1556



Art. 1551, 1553
Art. 1555, 1557