


# ASKER

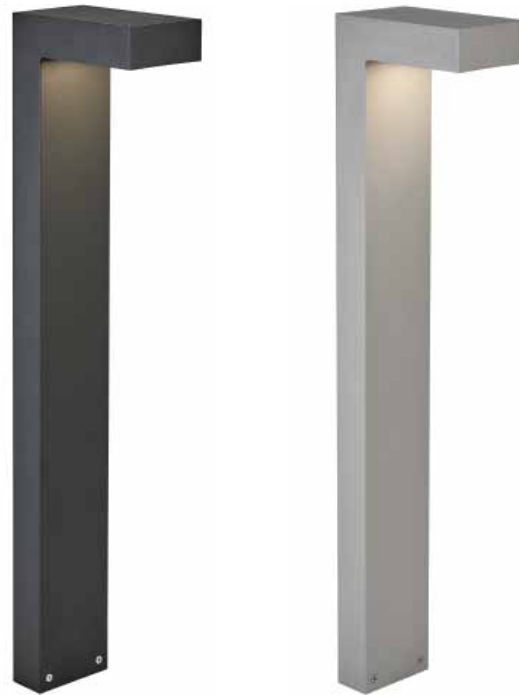


**ASKER** Powder coated aluminium bollard. Ideal for path-way lighting where light pollution is an issue.

Art	Watt	Type of light source:	Luminous flux	Colour temperature	Lifetime (L70/B50)	EEL	Lens/optic	Features	Light sharing
1311	9,5W	LED	585 lm	3000K	50 000h	A+	-	-	Symmetric
1314*	7,7W	LED	634 lm	3000K	109 000h	A++	SCL	Dim. Triac	Asymmetric
1316*	7,7W	LED	634 lm	3000K	109 000h	A++	VSM	Dim. Triac	Asymmetric

**Accessories for Asker do Art. 1311 i 1314**

1907	Concreting anchor	p. 115
1908	Anchoring support	p. 115



\*Asker bollard with 4000K or DALI available by request, contact your supplier.