


### FRASER LED

PMMA, stal chromowana / PMMA, electroplated steel /  
PMMA, хромированная сталь


6945 ● CH



### FRASER LED

PMMA, stal chromowana / PMMA, electroplated steel /  
PMMA, хромированная сталь

6944 ● CH



### FRASER LED

PMMA, stal chromowana / PMMA, electroplated steel /  
PMMA, хромированная сталь

6943 ● CH



### BRAZOS

stal chromowana, szkło / electroplated steel, glass /  
хромированная сталь, стекло

6948 ● CH

1×G9, max 25W

IP 44



### BRAZOS

stal chromowana, szkło / electroplated steel, glass /  
хромированная сталь, стекло

6950 ● CH

2×G9, max 25W

IP 44




### BRAZOS

stal chromowana, szkło / electroplated steel, glass /  
хромированная сталь, стекло

6951 ● CH

3×G9, max 25W

IP 44

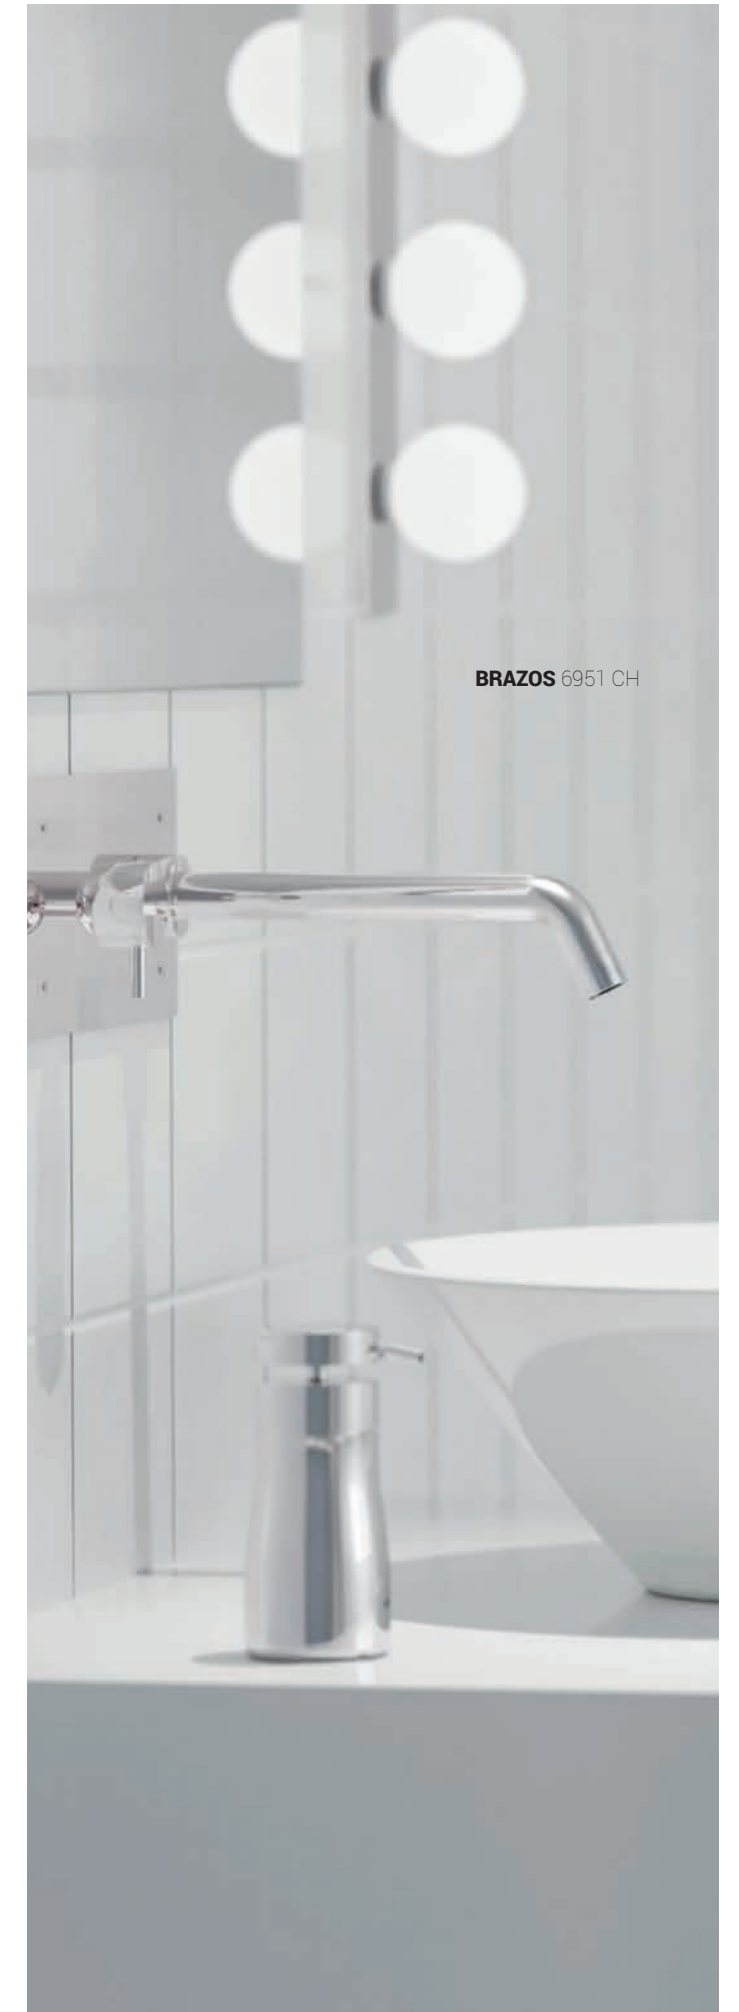

**BRAZOS** 6951 CH

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI >)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION
6943	1×6W LED	4000K	360 lm	120°	80	~220-240V, 50Hz	□	0,8	IP 44
6944	1×8W LED	4000K	420 lm	120°	80	~220-240V, 50Hz	□	0,8	IP 44
6945	1×12W LED	4000K	720 lm	120°	80	~220-240V, 50Hz	□	0,8	IP 44