




LENS 9113 WH




LENS 9112 BL

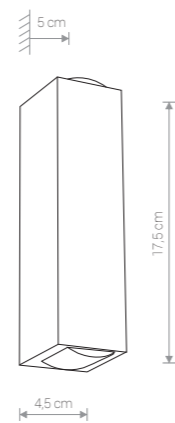

LENS LED

aluminium / aluminium / алюминий
9112 ● BL 9113 ○ WH

EDESA LED S 9110 BL

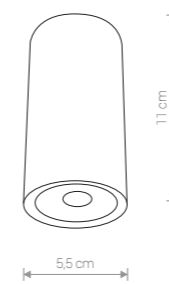


EDESA LED S

aluminium / aluminium / алюминий
9110 ● BL 9111 ○ WH



EDESA LED M 9108 WH



EDESA LED M

aluminium / aluminium / алюминий
9107 ● BL 9108 ○ WH

Item No.	POWER	COLOUR TEMP	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI >)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION	LIFETIME
9107, 9108	6W LED	3000K	370 lm	68°	80	~220-240V, 50Hz	⊕	0,55	IP 54	10 000 h
9110, 9111	3W LED	3000K	250 lm	52°	80	~220-240V, 50Hz	⊕	0,55	IP 54	10 000 h
9112, 9113	2×2W LED	3000K	110 lm	10°	80	~220-240V, 50Hz	⊕	0,55	IP 54	10 000 h