




PICCO LED S 9106 SI




PICCO LED S

aluminium / aluminium / алюминий

9106  SI



PICCO LED M 9105 SI




PICCO LED M

aluminium / aluminium / алюминий

9105  SI



PICCO LED L 9104 SI




PICCO LED L

aluminium / aluminium / алюминий

9104  SI




PAOLI 9554 SI



PAOLI

aluminium, szkło / aluminium, glass / алюминий, стекло

9554  SI

 1xGU10, max 10W
IP 67




MON 4454 SI







MON

aluminium, szkło / aluminium, glass / алюминий, стекло

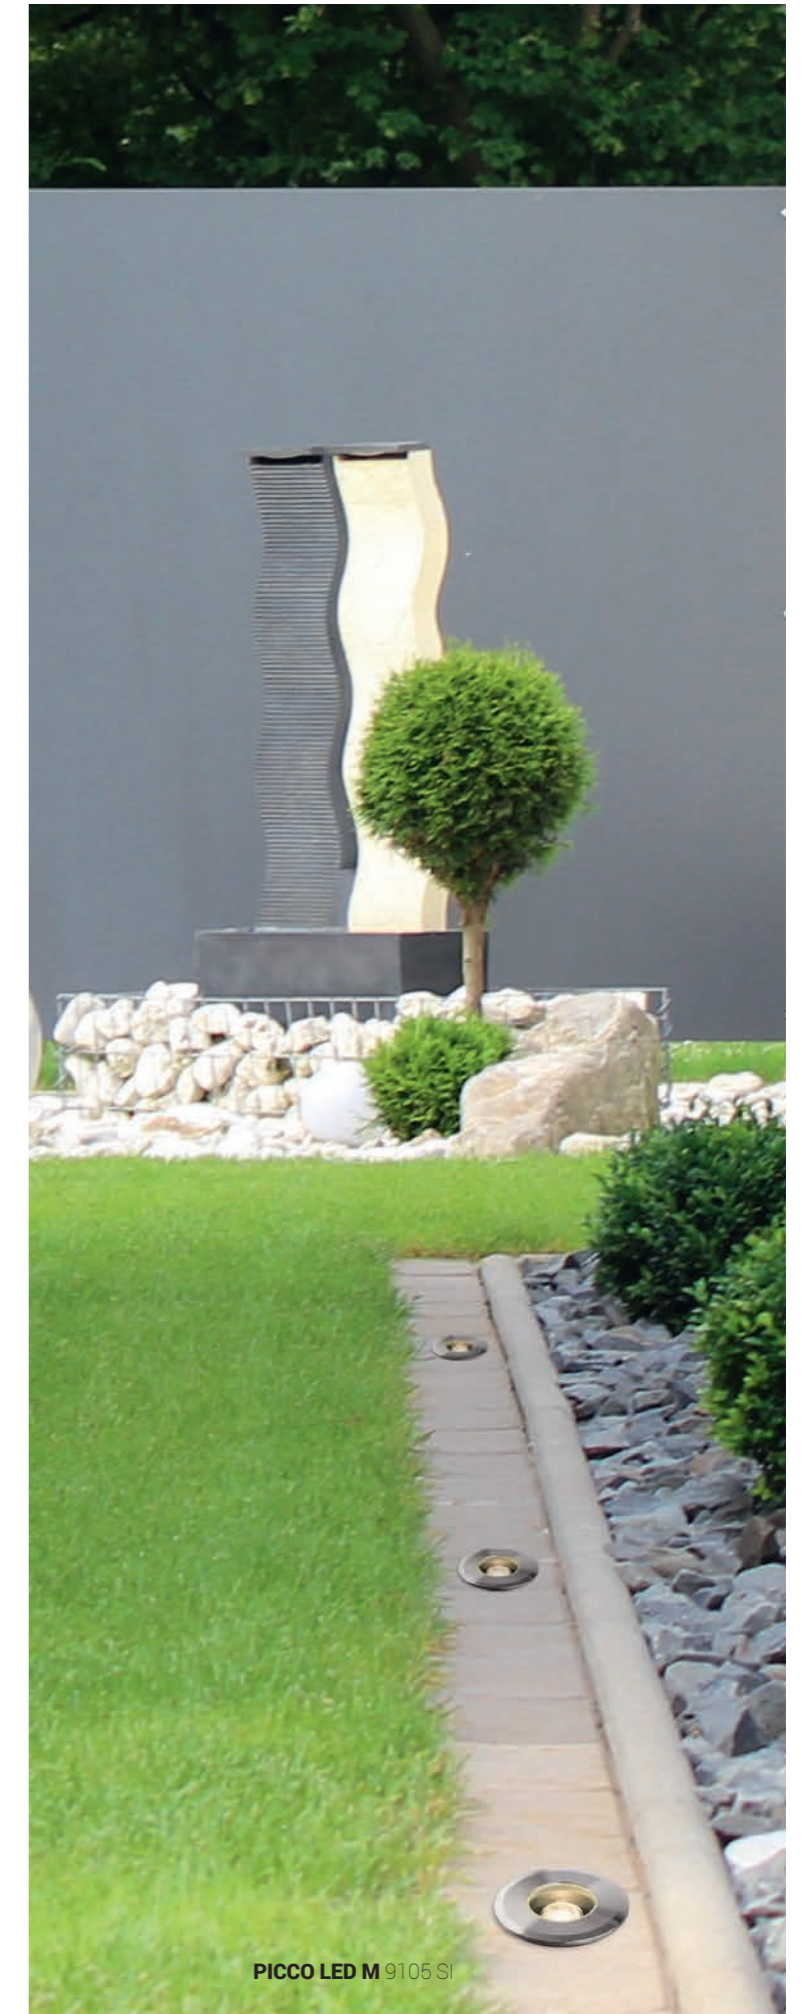4454  SI



PICCO LED M 9105 SI

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI >)	INPUT	SAFETY TYPE	POWER FACTOR	INGRESS PROTECTION	INGRESS PROTECTION
9106	1x1W LED	3000K	47 lm	42°	80	~220-240V, 50Hz		0,55	IP 67	10 000 h
9105	1x1W LED	3000K	52 lm	51°	80	~220-240V, 50Hz		0,55	IP 67	10 000 h
9104	1x3W LED	3000K	130 lm	48°	80	~220-240V, 50Hz		0,55	IP 67	10 000 h
4454	1x1W LED <small>CREE</small>	3000K	68 lm	28°	80	~200-240V, 50Hz		0,42	IP 67	10 000 h