





SPIN LED M 10370

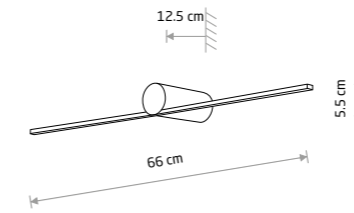

SPIN LED S

■ painted aluminum, plastic PC


■ 10368 3000K ■ 10620 4000K

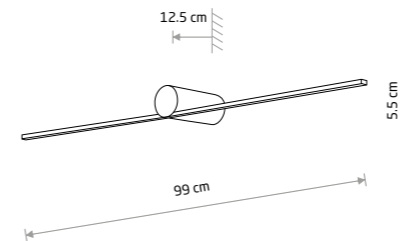

SPIN LED M

■ painted aluminum, plastic PC

■ 10370 3000K ■ 10621 4000K

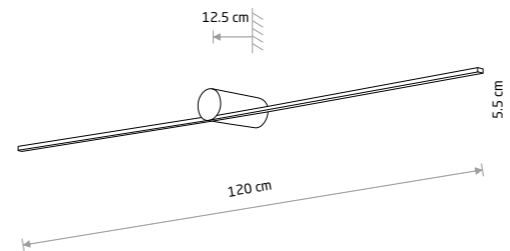

SPIN LED L

■ painted aluminum, plastic PC

■ 10371 3000K ■ 10622 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10368	10W LED	3000K	360 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10620	10W LED	4000K	390 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10370	14W LED	3000K	520 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10621	14W LED	4000K	550 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10371	16W LED	3000K	600 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10622	16W LED	4000K	630 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h