

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 8734 CL IOS LED WHITE 30W, 4000K, ANGLE60°



#### Description Lines

---

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8734,CL IOS LED WHITE 30W,4000K,ANGLE60
File name:	8734,CL IOS LED WHITE 30W,4000K,ANGLE60.ltd
Date:	2019-12-12
Report number:	EF 12/12/2019/52; EF 11/12/2019/53
Diameter:	135mm
Height:	135mm
IP rating:	IP 20
Protection class:	I
Dimmable:	No

#### Equipment

---

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	1 deg
C interval:	10 deg
γ range:	0-90 deg
Measurement distance:	6.56 m

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

[www.nowodvorski.com](http://www.nowodvorski.com)

## Photometric data

Total luminous flux:	2806.49lm
Color temperature:	3967 K
x:	0.3845
y:	0.3869
Color rendering index:	90.4
Wattage:	27.077 W
U	230.43 V
I	0.1219 A
Power factor:	0.9640
Luminous efficacy:	103.65 lm/W
Flux in lower hemisphere:	100.0%
Flux in upper hemisphere:	0.0%
Maximum luminous intensity:	3367 cd
Light output ratio (LOR):	100.00%

Beam cone diagram  
Beam angle 60°

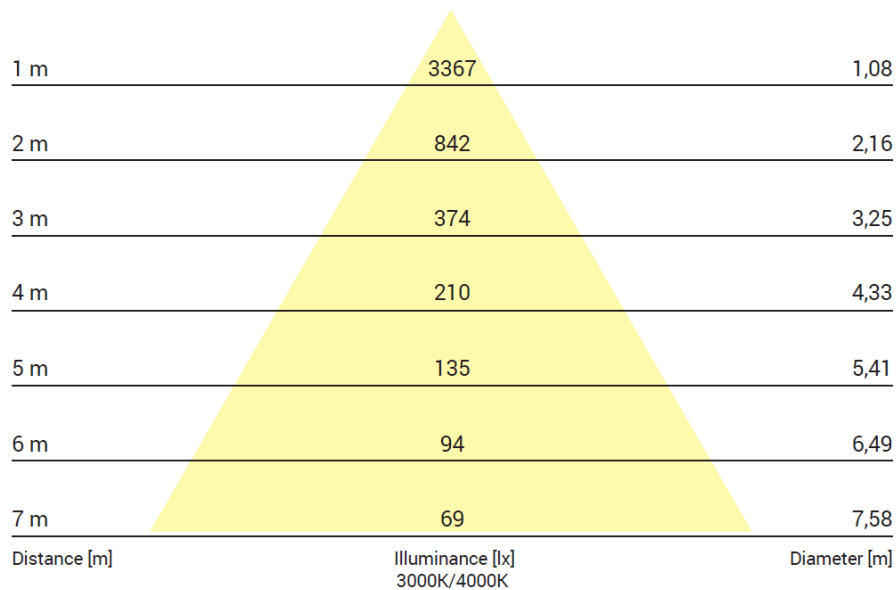


**Nowodvorski sp. j.**

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


[www.nowodvorski.com](http://www.nowodvorski.com)

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

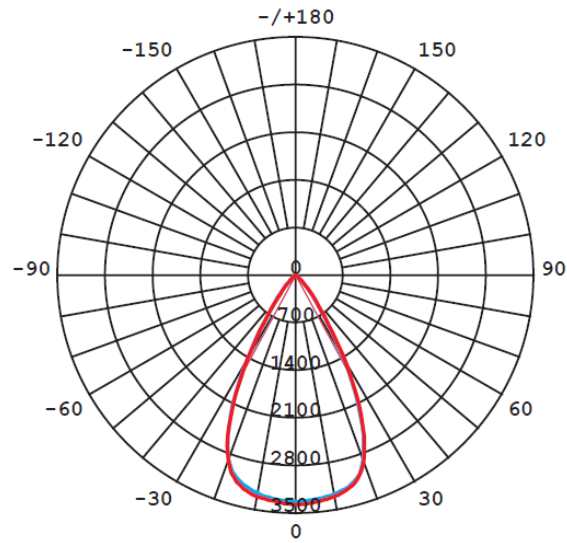

Luminous intensity [cd]  
 C0-C180 ————  
 C90-C270 ————

### Spectral distribution

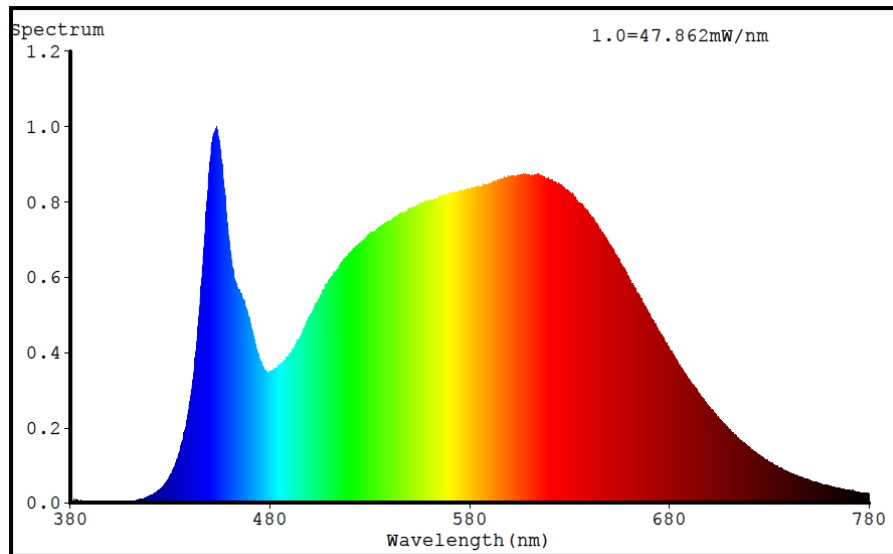

**Nowodvorski sp. j.**  
 ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208  
 Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12  
[www.nowodvorski.com](http://www.nowodvorski.com)