
LUMINAIRE PHOTOMETRIC TEST REPORT

8748 CTLS NEA LED BLACK 40W, 3000K, ANGLE20°



Description Lines

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE20
File name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE20.ldt
Date:	2019-12-06
Report number:	EF 06/12/2019/31; EF 12/12/2019/35
Length:	170 mm
Width:	75 mm
Height:	205 mm
IP rating:	IP 20
Protection class:	I
Dimmable:	No

Equipment

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	2 deg
C interval:	10 deg
γ range:	0-180 deg
Measurement distance:	6.56 m

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

Photometric data

Total luminous flux:	3561.57 lm
Color temperature:	2971 K
x:	0.4396
y:	0.4061
Color rendering index:	92.4
Wattage:	36.210 W
U	230.53 V
I	0.1628 A
Power factor:	0.9650
Luminous efficacy:	98.36 lm/W
Flux in lower hemisphere:	98.6%
Flux in upper hemisphere:	1.4%
Maximum luminous intensity:	19752 cd
Light output ratio (LOR):	100.00%

Beam cone diagram Beam angle 20°

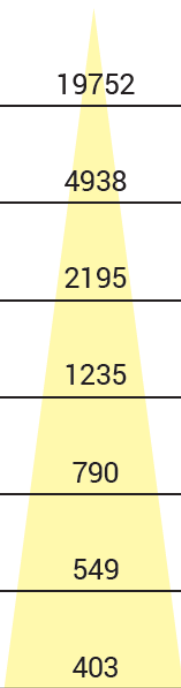


1 m	19752	0,36
2 m	4938	0,72
3 m	2195	1,08
4 m	1235	1,43
5 m	790	1,79
6 m	549	2,15
7 m	403	2,51
Distance [m]	Illuminance [lx] 3000K/4000K	Diameter [m]

Nowodvorski sp. j.


ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208
Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

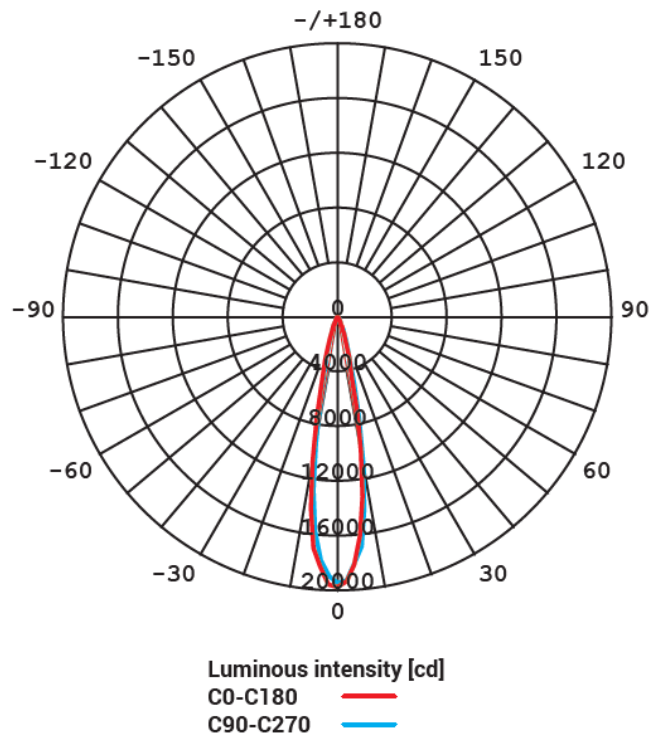

Spectral distribution

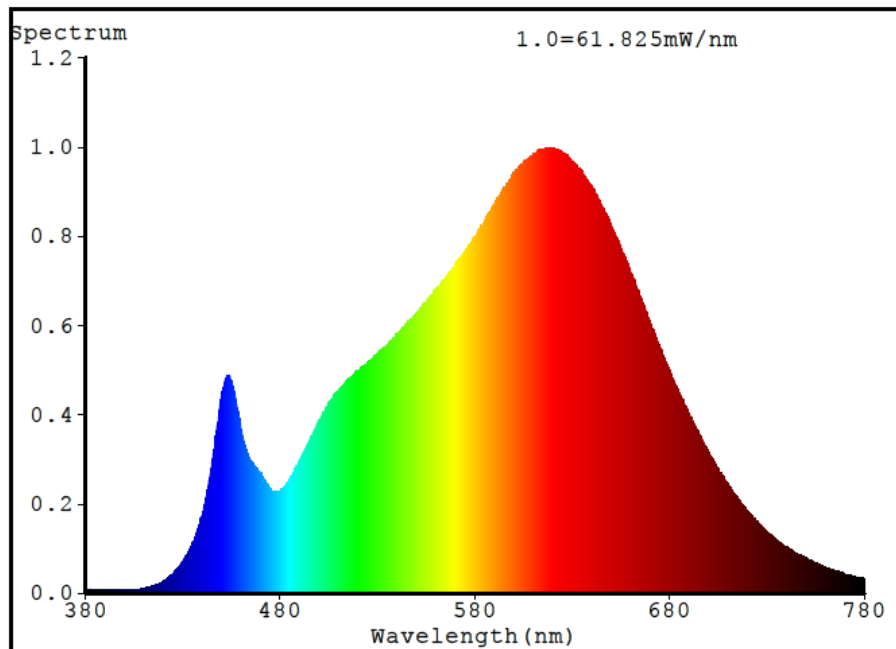

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

LUMINAIRE PHOTOMETRIC TEST REPORT

8748 CTLS NEA LED WHITE 40W, 3000K, ANGLE37°



Description Lines

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE37
File name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE37.ldt
Date:	2019-12-06
Report number:	EF 06/12/2019/34; EF 12/12/2019/35
Length:	170 mm
Width:	75 mm
Height:	205 mm
IP rating:	IP 20
Protection class:	I
Dimmable:	No

Equipment

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	2 deg
C interval:	10 deg
γ range:	0-180 deg
Measurement distance:	6.56 m

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

Photometric data

Total luminous flux:	3689.54 lm
Color temperature:	2971 K
x:	0.4396
y:	0.4061
Color rendering index:	92.4
Wattage:	36.274 W
U	230.37 V
I	0.1631 A
Power factor:	0.9652
Luminous efficacy:	101.71 lm/W
Flux in lower hemisphere:	98.6%
Flux in upper hemisphere:	1.4%
Maximum luminous intensity:	7921 cd
Light output ratio (LOR):	100.00%

Beam cone diagram Beam angle 37°

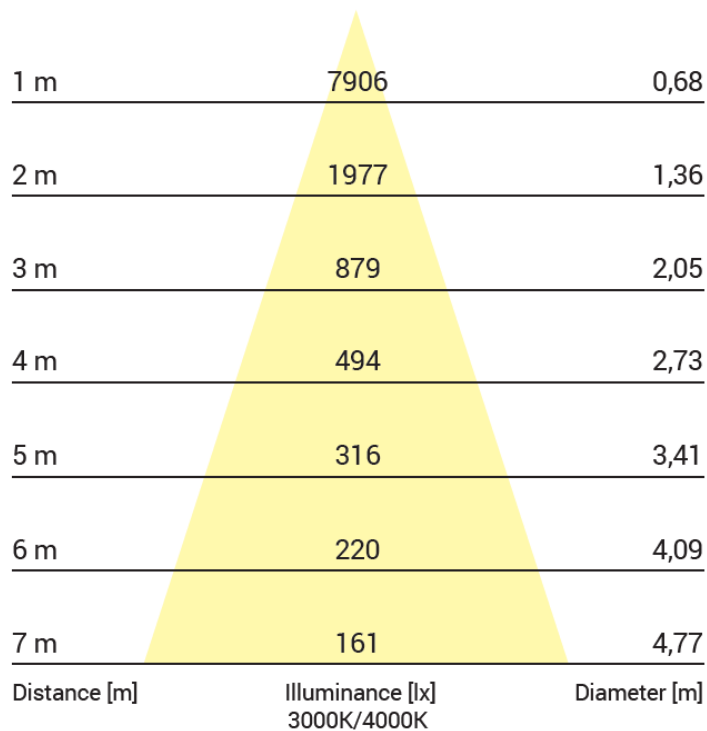


Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

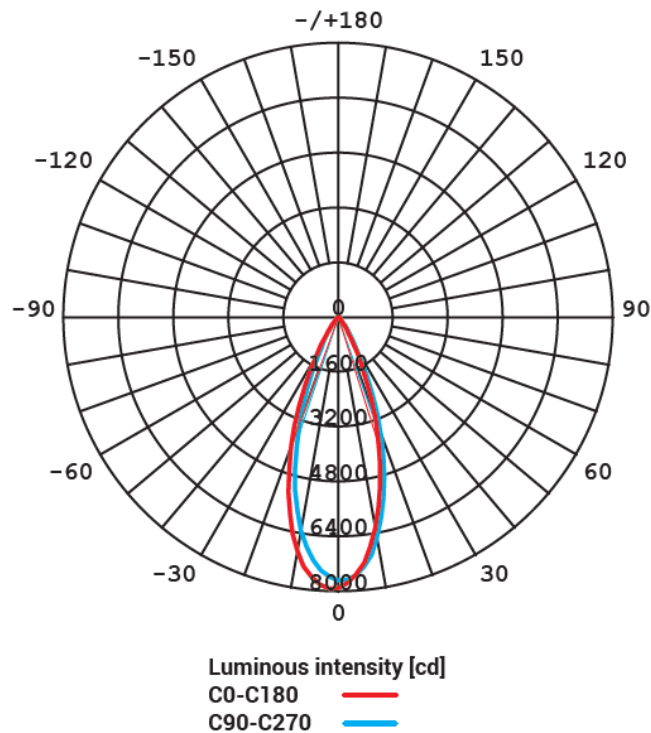

Spectral distribution

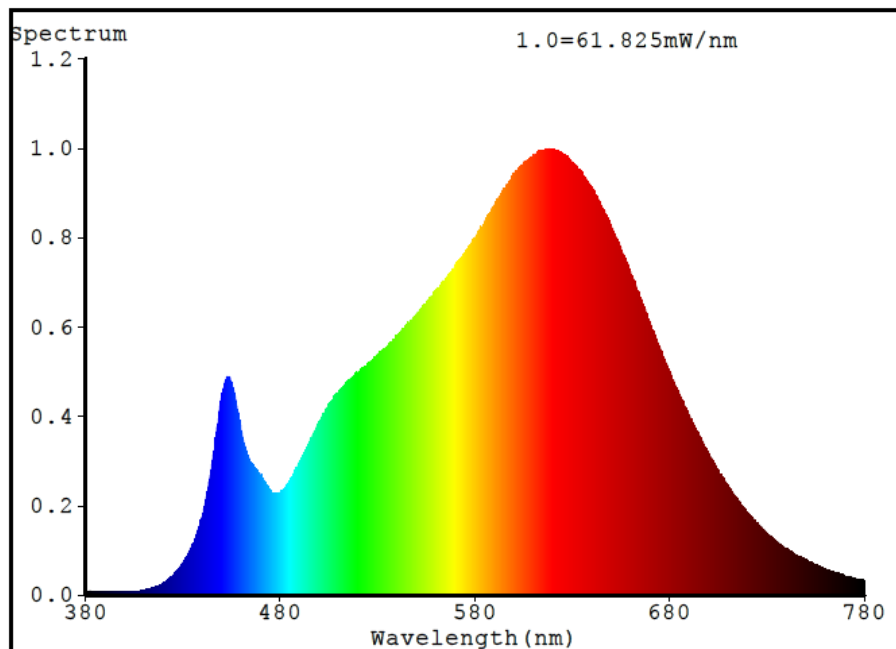

LUMINAIRE PHOTOMETRIC TEST REPORT

8748 CTLS NEA LED WHITE 40W, 3000K, ANGLE25°



Description Lines

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE25
File name:	8748 CTLS NEA LED WHITE 40W,3000K,ANGLE25.ltd
Date:	2019-12-06
Report number:	EF 06/12/2019/33; EF 12/12/2019/35
Length:	170 mm
Width:	75 mm
Height:	205 mm

Equipment

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
γ interval:	2 deg
C interval:	10 deg
γ range:	0-180 deg
Measurement distance:	6.56 m

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

Photometric data

Total luminous flux:	3492.63 lm
Color temperature:	2971 K
Color rendering index:	92.4
Wattage:	36.241 W
U	230.39 V
I	0.1630 A
Power factor:	0,9651
Luminous efficacy:	96.37 lm/W
Flux in lower hemisphere:	98.6%
Flux in upper hemisphere:	1.4%
Maximum luminous intensity:	15100 cd
Light output ratio (LOR):	100.00%

Beam cone diagram Beam angle 25°

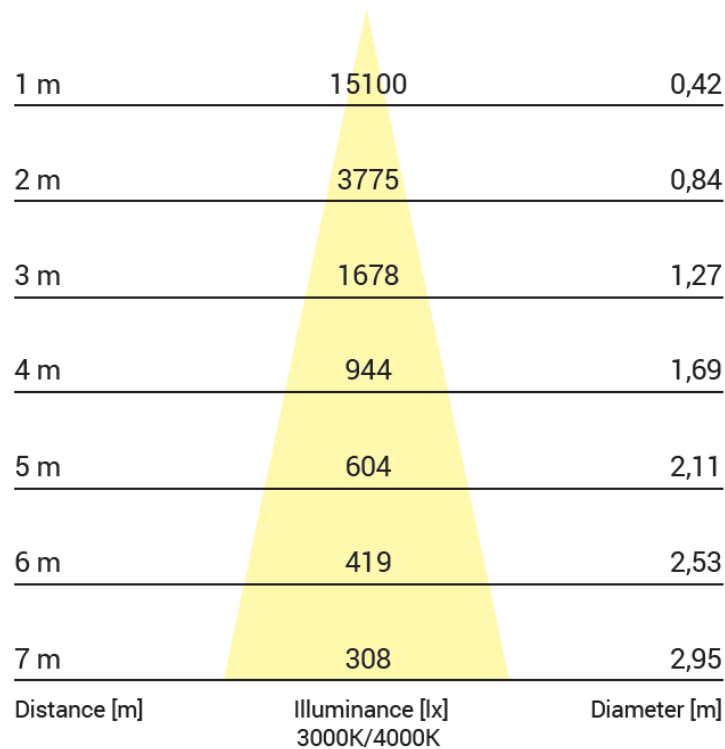


Nowodvorski sp. j.


ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208
Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

www.nowodvorski.com

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

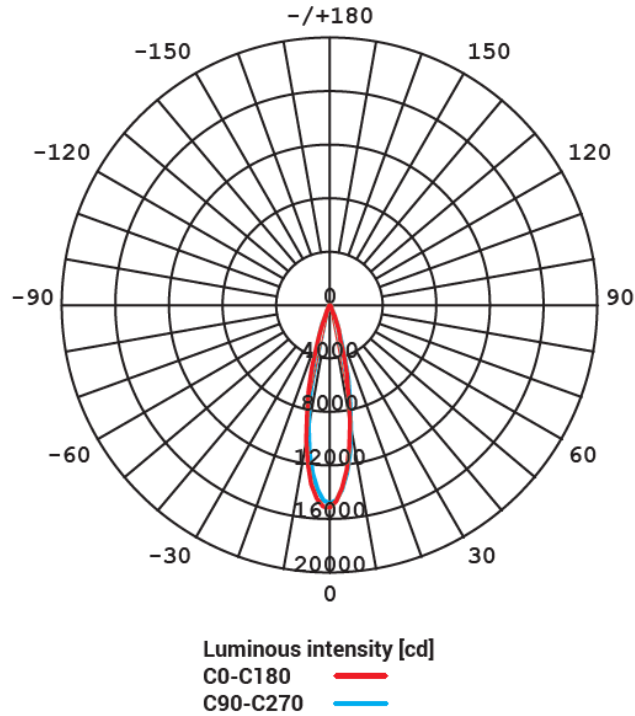

Spectral distribution

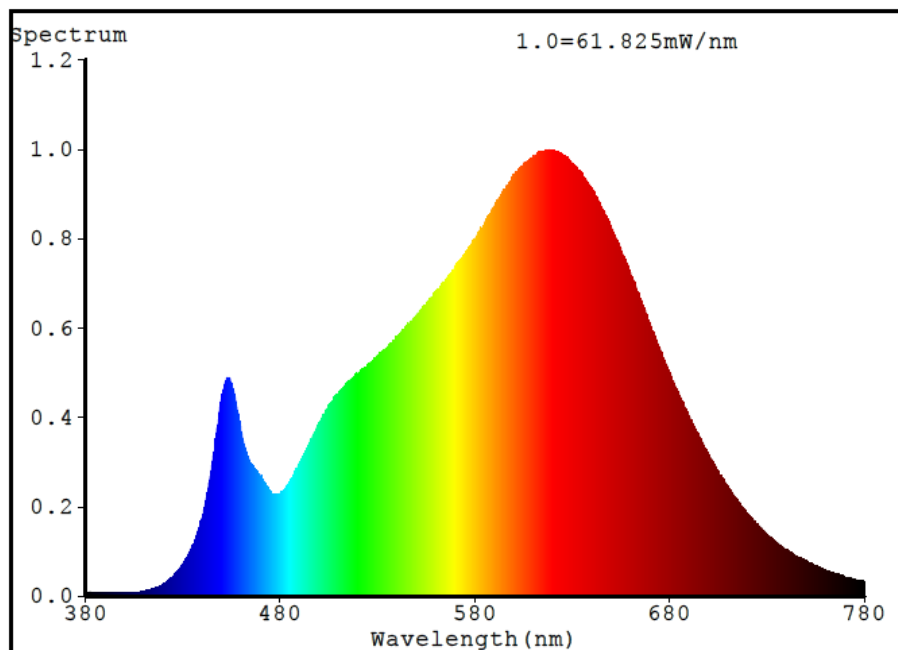

Nowodvorski sp. j.
 ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208
 Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12
www.nowodvorski.com