

---

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 8767 CL KEA LED 40W, 4000K



#### Description Lines

---

|                   |                               |
|-------------------|-------------------------------|
| Manufacturer:     | NOWODVORSKI LIGHTING          |
| Model name:       | 8767 CL KEA LED 40W,4000K     |
| File name:        | 8767 CL KEA LED 40W,4000K.ltd |
| Date:             | 2019-10-28                    |
| Report number:    | EF 28/10/2019/7               |
| Diameter:         | 220mm                         |
| Height:           | 114mm                         |
| IP rating:        | IP 44/IP 20                   |
| Protection class: | II                            |
| Dimmable:         | No                            |

#### Equipment

---

|                       |                                       |
|-----------------------|---------------------------------------|
| Test system:          | EVERFINE GO-2000B_V1 SYSTEM V2.00.417 |
| Temperature:          | 25 +/-1 °C                            |
| Humidity:             | 65.0%                                 |
| γ interval:           | 2 deg                                 |
| C interval:           | 10 deg                                |
| γ range:              | 0-180 deg                             |
| Measurement distance: | 6.56 m                                |

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208


Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

[www.nowodvorski.com](http://www.nowodvorski.com)

## Photometric data

|                             |            |
|-----------------------------|------------|
| Total luminous flux:        | 2754.82 lm |
| Color temperature:          | 3884 K     |
| x:                          | 0.3880     |
| y:                          | 0.3876     |
| Color rendering index:      | 94.1       |
| Wattage:                    | 39.911 W   |
| U                           | 220.44 V   |
| I                           | 0.1851 A   |
| Power factor:               | 0.9782     |
| Luminous efficacy:          | 69.02 lm/W |
| Flux in lower hemisphere:   | 98.7%      |
| Flux in upper hemisphere:   | 1.3%       |
| Maximum luminous intensity: | 2139 cd    |
| Light output ratio (LOR):   | 100.00%    |

### Beam cone diagram Beam angle 65°

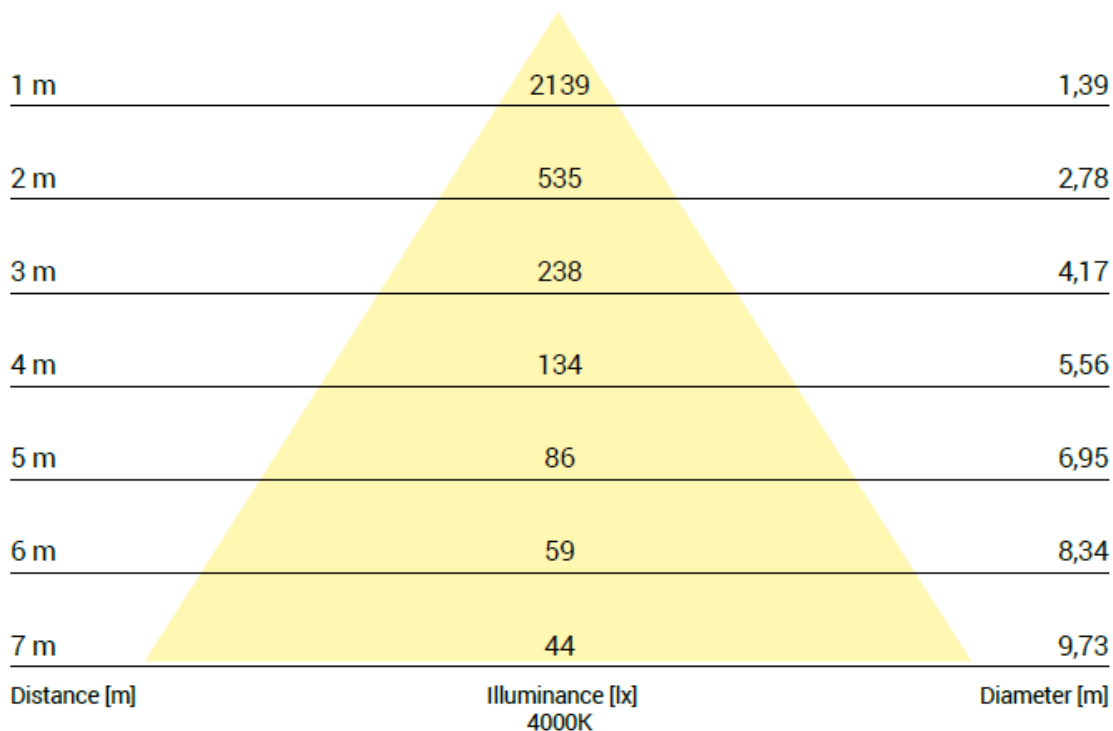


Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12


[www.nowodvorski.com](http://www.nowodvorski.com)

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

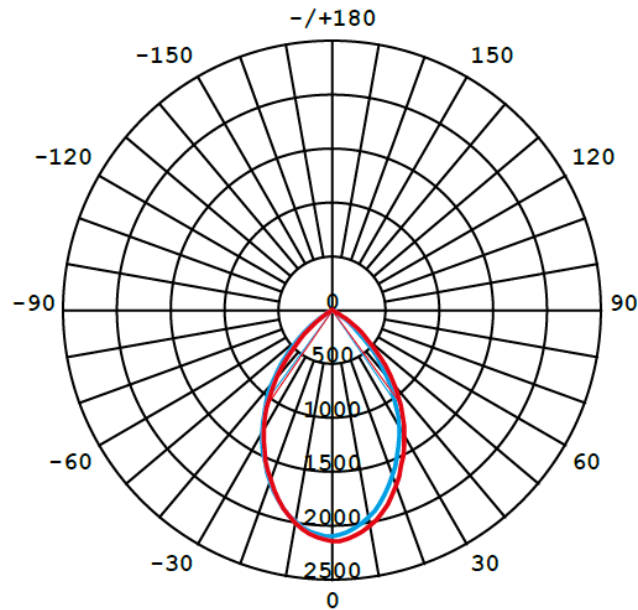

Luminous intensity [cd]  
 C0-C180 ————  
 C90-C270 ————

## Spectral distribution

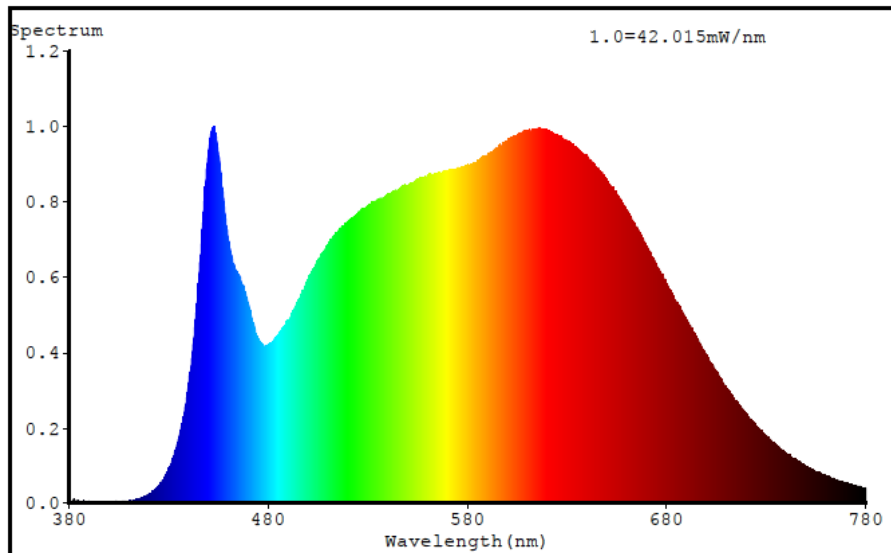

**Nowodvorski sp. j.**  
 ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208  
 Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12  
[www.nowodvorski.com](http://www.nowodvorski.com)