

---

## LUMINAIRE PHOTOMETRIC TEST REPORT

### 8781 CL KOS LED 8W, 4000K



#### Description Lines

---

Manufacturer:	NOWODVORSKI LIGHTING
Model name:	8781 CL KOS LED 8W,4000K
File name:	8781 CL KOS LED 8W,4000K.ltd
Date:	2019-12-20
Report number:	EF 20/12/2019/19
Diameter:	120mm
Height:	35mm
IP rating:	IP 44
Protection class:	II
Dimmable:	No

#### Equipment


---

Test system:	EVERFINE GO-2000B_V1 SYSTEM V2.00.417
Temperature:	25 +/-1 °C
Humidity:	65.0%
$\gamma$ interval:	1 deg
C interval:	10 deg
$\gamma$ range:	0-90 deg
Measurement distance:	6.56 m

## Photometric data

Total luminous flux:	685.587 lm
Color temperature:	3959 K
x:	0.3831
y:	0.3807
Color rendering index:	84.7
Wattage:	7.2761 W
U	230.63 V
I	0.0608 A
Power factor:	0.5185
Luminous efficacy:	94.22 lm/W
Flux in lower hemisphere:	100.0%
Flux in upper hemisphere:	0.0%
Maximum luminous intensity:	269.6 cd
Light output ratio (LOR):	100.00%

Beam cone diagram  
Beam angle 100°

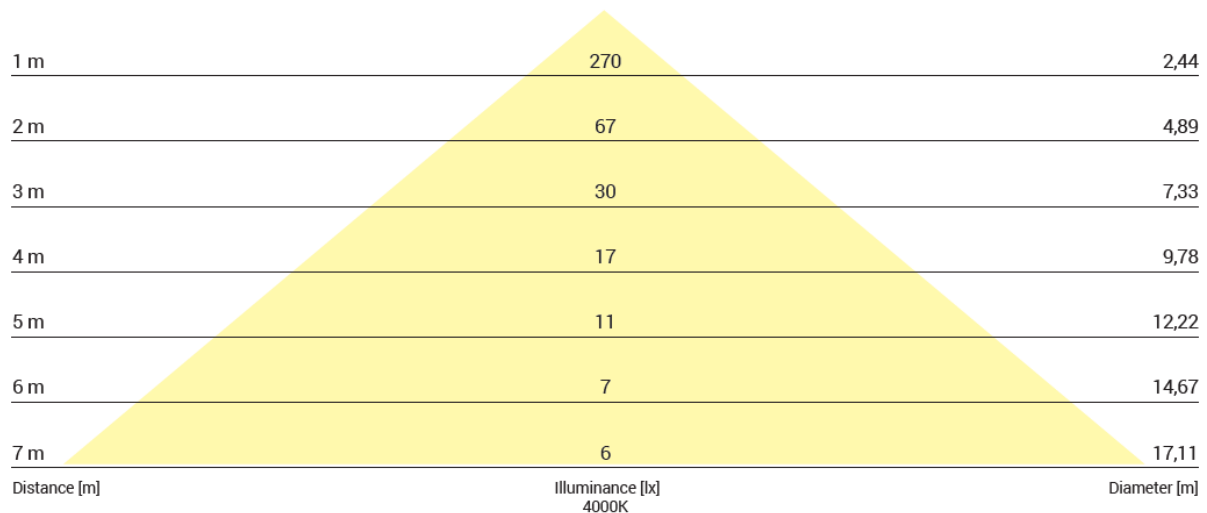


### Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

[www.nowodvorski.com](http://www.nowodvorski.com)

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

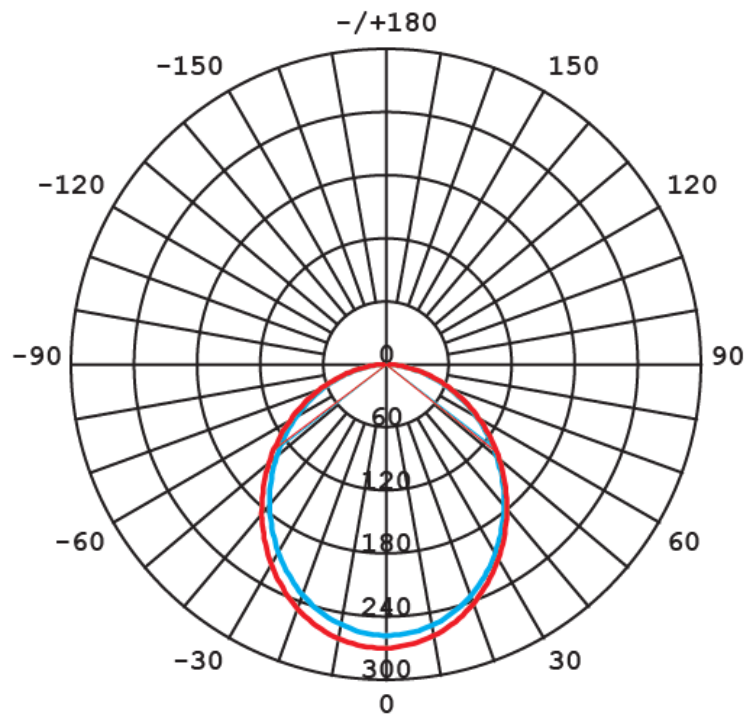


Luminous intensity [cd]

C0-C180 ————

C90-C270 ————

## Spectral distribution

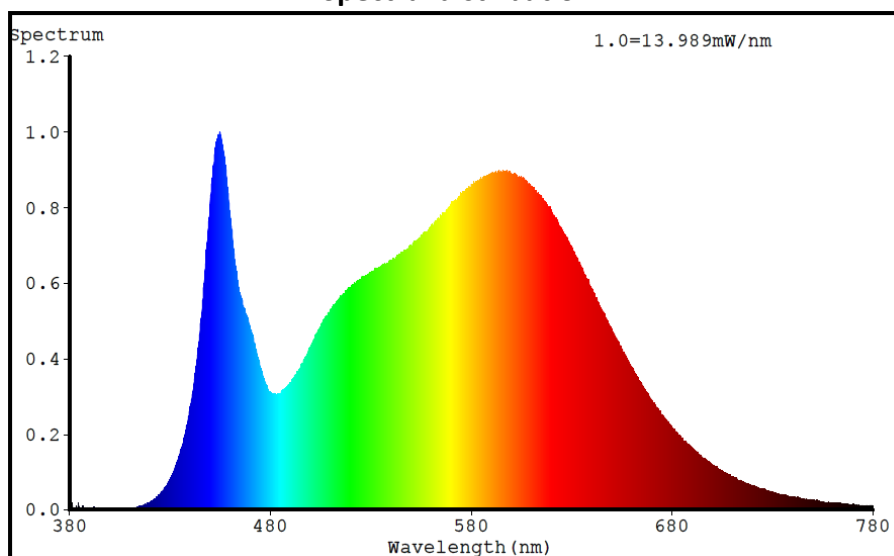

Nowodvorski sp. j.

ul. Bojemskiego 11, 42-202 Częstochowa, POLSKA, NIP: PL 5731015208

Tel. +48 34 344 91 10, 344 91 11, fax +48 34 344 91 12

[www.nowodvorski.com](http://www.nowodvorski.com)