





# CL KOS LED 8W

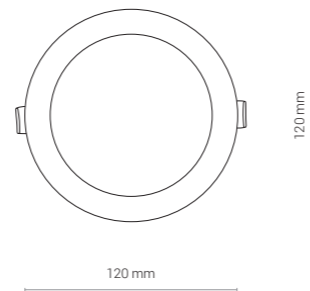

cut out  $\phi$  100 mm

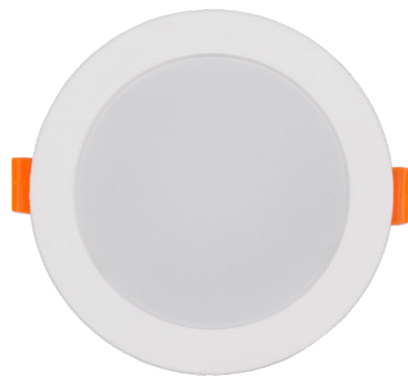


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

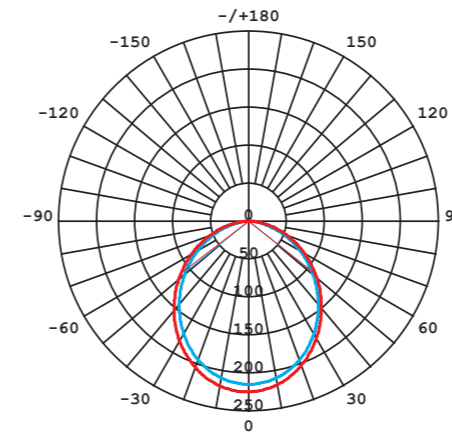


Luminous intensity [cd]  
C0-C180 —  
C90-C270 —

Beam cone diagram  
Beam angle 100°

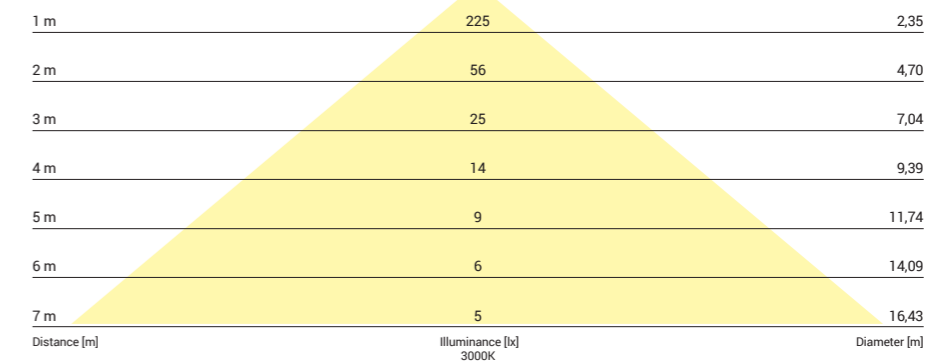


8782, 8W, 3000K, beam angle 100°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

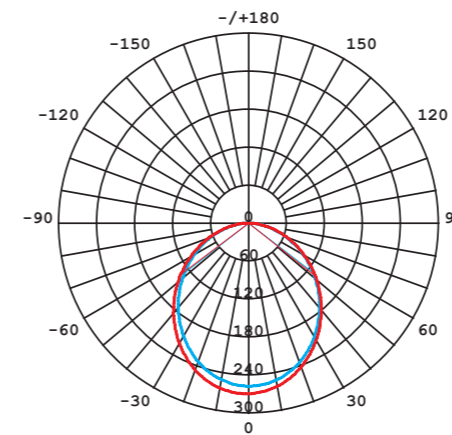

Luminous intensity [cd]  
C0-C180 —  
C90-C270 —

Beam cone diagram  
Beam angle 100°

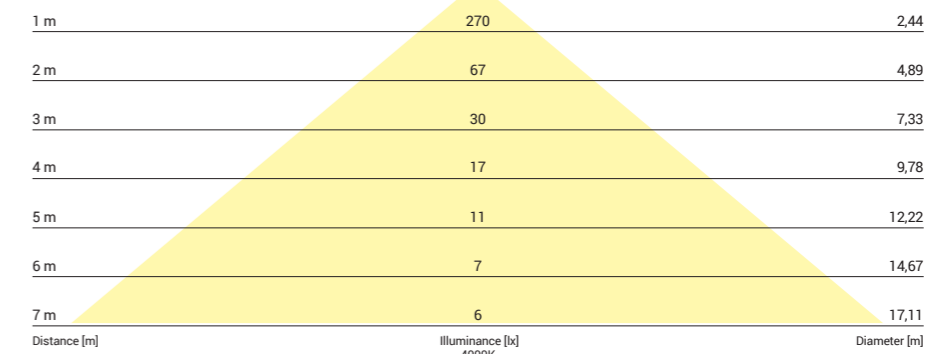

8781, 8W, 4000K, beam angle 100°

# CL KOS LED 8W

PC / PC / PC

8782 ○ WH - 3000K

8781 ○ WH - 4000K

Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8782	8W	3000K	600	100°	≥80	44	SANAN	DRIVER ON BOARD	50000h	5 YEARS
8781	8W	4000K	600	100°	≥80	44	SANAN	DRIVER ON BOARD	50000h	5 YEARS