




ELLIPSES LED 8140 WH



ELLIPSES LED 8182 BL



ELLIPSES LED 8181 BL/G




ELLIPSES LED

aluminium / aluminum / алюминий

8181  BL/G 8182  BL 8140  WH


Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8181	2x5W	3000K	600 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h
8182	2x5W	3000K	600 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h
8140	2x5W	3000K	600 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h

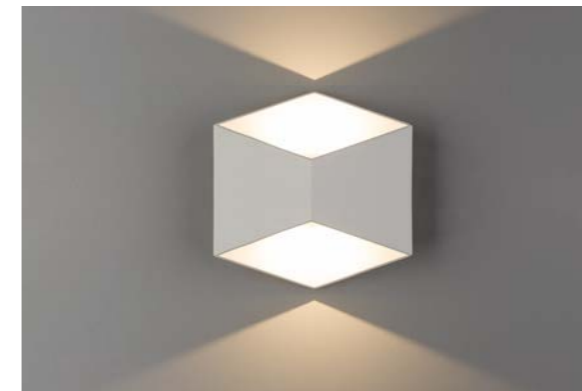


TRIANGLES LED 8143 WH



TRIANGLES LED 8142 BL

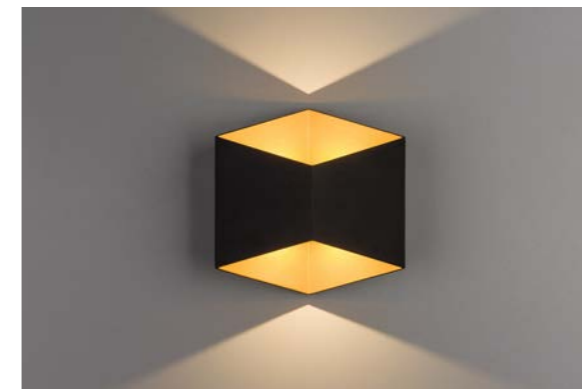

TRIANGLES LED 8141 BL/G



TRIANGLES LED

aluminium / aluminum / алюминий

8141  BL/G 8142  BL 8143  WH

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8141	2x5W	3000K	450 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h
8142	2x5W	3000K	450 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h
8143	2x5W	3000K	450 lm	180°	90	~220-230V, 50/60Hz	0,5	⊕	IP54	10 000h