


TUBINGS 8160 BL



TUBINGS


aluminium, szkło / aluminum, glass / алюминий, стекло

8160 ● BL

1xGU10, max 35W, only LED

IP54

TUBINGS 8161 BL

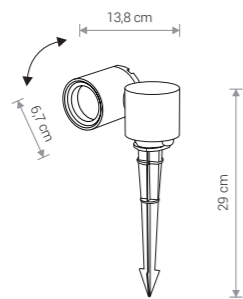

TUBINGS


aluminium, szkło / aluminum, glass / алюминий, стекло

8161 ● BL

1xGU10, max 35W, only LED

IP54

TUBINGS 8158 BL

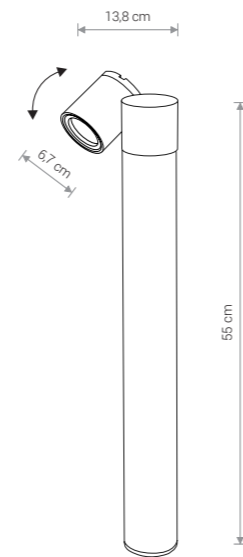

TUBINGS

aluminium, szkło / aluminum, glass / алюминий, стекло


8158 ● BL

1xGU10, max 35W, only LED


IP54



PAT LED 8162 BL




cut out ø 5,6 cm




PAT LED

aluminium, PC / aluminium, PC / алюминий, PC

8162 ● BL



cut out ø 5,7 cm



CIRCLET LED

aluminium, PC / aluminium, PC / алюминий, PC

8163 ● BL

Item No.	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI ≥)	INPUT	POWER FACTOR	SAFETY CLASS	INGRESS PROTECTION	LIFETIME
8162	3W	3000K	12 lm	25°	80	~220-230V, 50/60Hz	0,5	⊕	IP65	10 000h
8163	3W	3000K	120 lm	47°	80	~220-230V, 50/60Hz	0,5	⊕	IP65	10 000h