


SIDEWALK ROUND LED

aluminium, PC / aluminium, PC / алюминий, PC


8147 ● BL

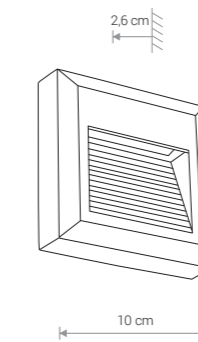

SIDEWALK SQUARE LED

aluminium, PC / aluminium, PC / алюминий, PC


8148 ● BL

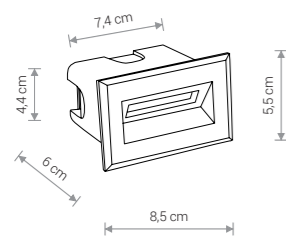

BAY LED S

aluminium, PC / aluminium, PC / алюминий, PC

8164 ● BL

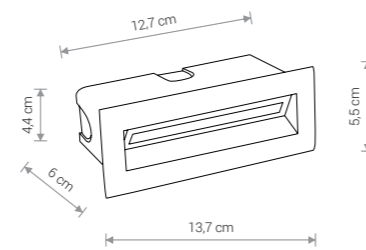

BAY LED M

aluminium, PC / aluminium, PC / алюминий, PC

8165 ● BL

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8164 | 3W | 3000K | 220 lm | 54° | 80 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP65 | 10 000h |
| 8165 | 5W | 3000K | 380 lm | 51° | 80 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP65 | 10 000h |

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI ≥) | INPUT | POWER FACTOR | SAFETY CLASS | INGRESS PROTECTION | LIFETIME |
|----------|-------|--------------|---------------|------------|--------------------------------|--------------------|--------------|--------------|--------------------|----------|
| 8147 | 1,6W | 3000K | 61 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 20 000h |
| 8148 | 1,6W | 3000K | 61 lm | 120° | 80 | ~220-230V, 50/60Hz | 0,5 | ⊕ | IP54 | 20 000h |