

06 Downlights Fixed LED > UGR19 Adjustable CCT Range

10107UV/W



7W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 200mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

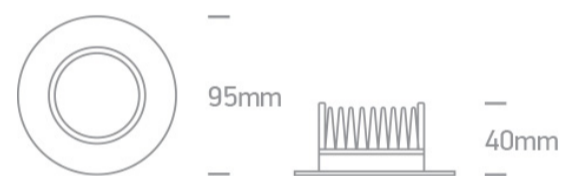

Gallery

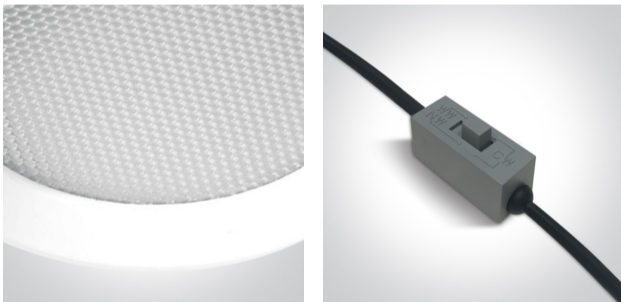

Physical Specification

Item Group

06 Downlights Fixed LED

Family

UGR19 Adjustable CCT Range

Order Code

10107UV/W

Colour

White

Material

Die Cast

Shape



Circular


Height

40mm

Diameter	95mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	No
IK Rating	4

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	180mA
Voltage	38V
Safety Class	
Power(Watts)	6,84W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand

Epistar

Pobrano z mamadecor.pl

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

5,4-8,4W

Power Factor

0,9

Constant Current

Yes

Output

180mA

Voltage Range

25-42V

IP Rating

IP44

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

Illumination Data

Colour Temperature

3000K-4000K-6000K

Lumen Output

525lm

Light Efficiency

75lm/W

CRI

80

Illumination Diagram



UGR

19

Packing Info

Pcs/Carton

40

Pobrano z mamadecor.pl

Barcode

5291889064817

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes

switch to
one light!

one
LIGHT

