


Product Datasheet

www.1-light.eu

06 Downlights Fixed LED>The Dark Light Project Range

10110TD/W/W

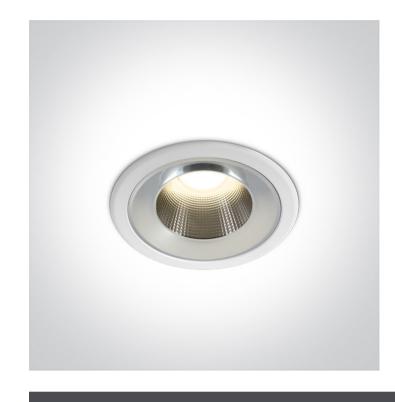

10W LED recessed downlight, IP54. Suitable for Indoor/Outdoor installation.

Complete with 250mA driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads









Dimensions



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Dark Light Project Range
Order Code	10110TD/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	67mm
Diameter	115mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes

Outdoor	Yes	Pobrano z mamadecor.pl
Adjustable	No	
lectrical Characteristics		
iectrical Characteristics		
Gear	External-Included	
Fitting + Driver		
Input Voltage	220-240V	
50 Hz	Yes	
60 Hz	Yes	
Safety Class		
Power(Watts)	10W	
IP Rating	IP54	
Light Source	LED built in	
Dimmable	No	
F Mark	F	
Fitting		
Input Type	Constant Current	
Input Current	250mA	
Voltage	39V	
Safety Class	<u> </u>	
Power(Watts)	9W	
IP Rating	IP54	
Light Source	LED built in	
LED Type	SMD 2835	
LED Brand	Epistar	
F Mark	F	
Gear		
Gear Type	Led Driver	

Input Voltage	220-240V	Pobrano z mamadecor.pl
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	7-9,2W	
Power Factor	0,9	
Constant Current	Yes	
Output	250mA	
Voltage Range	30-40V	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Housing Material	Plastic	
Output Terminal	Cable	
Brand	ONE	
Illumination Data		
IIIUIIIIIalioii Dala		
	000014	
Colour Temperature	3000K	
Colour Temperature Lumen Output	950lm	
Colour Temperature Lumen Output Light Efficiency	950lm 95lm/W	
Colour Temperature Lumen Output Light Efficiency CRI	950lm 95lm/W 80	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info	950lm 95lm/W 80 60°	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light	950lm 95lm/W 80 60° Yes	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width	950lm 95lm/W 80 60° 7 Yes	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length	950lm 95lm/W 80 60° Yes 14cm	
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Box Length Box Width Box Height	950lm 95lm/W 80 60° Yes 14cm 14cm 8cm	

Certification & Warranty	
Warranty	2 Years
Weee Directive	Yes

switch to one light!

