

06 Downlights Fixed LED>The IP54 Bathroom Downlights

10113B/W/C



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

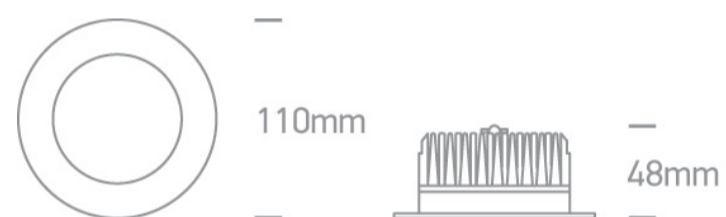

Gallery



Physical Specification

Item Group

06 Downlights Fixed LED

Family

The IP54 Bathroom Downlights

Order Code

10113B/W/C

Colour

White

Material

Die Cast

Diffuser Material



Plastic

Shape


Circular

| | |
|----------------------|-------|
| Height | 48mm |
| Diameter | 110mm |
| Cutout Hole Diameter | 95mm |
| Recessed Ceiling | Yes |
| Depth Required | 70mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |


Electrical Characteristics

| Gear | External-Included |
|------------------|---------------------------------------------------------------------------------------|
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 13W |
| IP Rating | IP54 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

| Fitting | |
|---------------|---------------------------------------------------------------------------------------|
| Input Type | Constant Current |
| Input Current | 300mA |
| Voltage | 36V |
| Safety Class |  |
| Power(Watts) | 10,8W |
| IP Rating | IP54 |
| Light Source | LED built in |

| | |
|------------|-------------------------------------------------------------------------------------|
| LED Type | SMD 2835 |
| LED Brand | Epistar |
| LED Number | 27 |
| F Mark |  |

Gear

| | |
|------------------|---------------------------------------------------------------------------------------|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 9-12W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| Output | 300mA |
| Voltage Range | 30-40V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Ambient Temp | 45°C |
| Operating Temp | 85°C |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | 0 |
| Protection | Short Circuit and Overload |

Illumination Data

| | |
|--------------------|-----------|
| Colour Temperature | 4000K |
| Lumen Output | 950lm |
| Light Efficiency | 73,07lm/W |
| CRI | 80 |
| Beam Angle | 90° |



Packing Info

| | |
|------------|---------------|
| Box Length | 11,5cm |
| Box Width | 11,5cm |
| Box Height | 9cm |
| Box Weight | 0,316Kg |
| Pcs/Carton | 24 |
| Barcode | 5291889043218 |
| HS Code | 9405409900 |

Certification & Warranty

| | |
|------------------|----------|
| Warranty | 2 Years |
| Average Lifetime | 40000hrs |
| Weee Directive | Yes |

switch to
one light!

one
LIGHT

