

06 Downlights Fixed LED&gt;The 3-12W Round Recessed Panels Die cast

**10112F/W/EW**

12W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 500mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

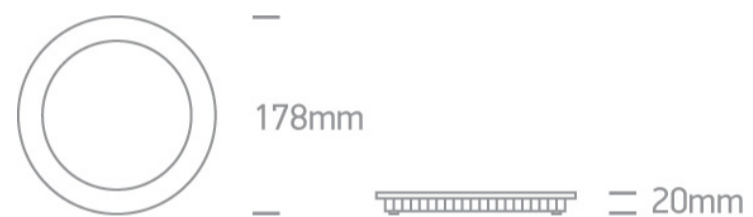

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 3-12W Round Recessed Panels Die cast

Order Code

10112F/W/EW

Colour

White

Material

Die Cast

Diffuser Material



Acrylic


Shape

Circular

Height	20mm
Diameter	178mm
Cutout Hole Diameter	165mm
Recessed Ceiling	Yes
Depth Required	40mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	12W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	18V
Safety Class	
Power(Watts)	9W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835

LED Brand

Chimei

Pobrano z mamadecor.pl

LED Number

108

## Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

8,5-10,5W

Power Factor

0,92

Constant Current

Yes

500mA

11-18V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

85°C

Housing Material

Plastic

Brand

One Light

## Illumination Data

Colour Temperature

2700K

Lumen Output

745lm

Light Efficiency

62,08lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



## Packing Info

Box Length

22cm

Box Width	18,5cm
Box Height	3cm
Box Weight	0,71Kg
Pcs/Carton	20
Barcode	5291889038986
HS Code	9405409900

#### Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

