

## 06 Downlights Fixed LED&gt;The COB Downlight Range Aluminium

## 10120C/G/C



20W COB LED recessed downlight, IP20.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

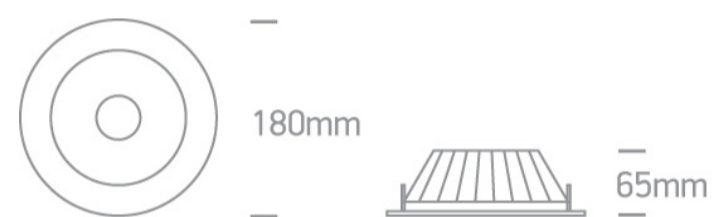

## Physical Specification

Item Group	06 Downlights Fixed LED
Family	The COB Downlight Range Aluminium
Order Code	10120C/G/C
Colour	Grey
Material	Aluminium
Shape	Circular
Height	65mm
Diameter	180mm
Cutout Hole Diameter	160mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes

## Electrical Characteristics

## Gear

## External-Included

## Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



## Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

38V

Safety Class



Power(Watts)

19W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

F Mark




## Gear

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	13,5-21W
Power Factor	0,8
Constant Current	Yes
500mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud

#### Illumination Data

Colour Temperature	4000K
Lumen Output	1400lm
Light Efficiency	70lm/W
CRI	80
Beam Angle	80°
Illumination Diagram	

#### Packing Info

Box Length	20cm
Box Width	20cm
Box Height	8cm
Box Weight	0,71kg
Pcs/Carton	18
Barcode	5291889040323
HS Code	9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

