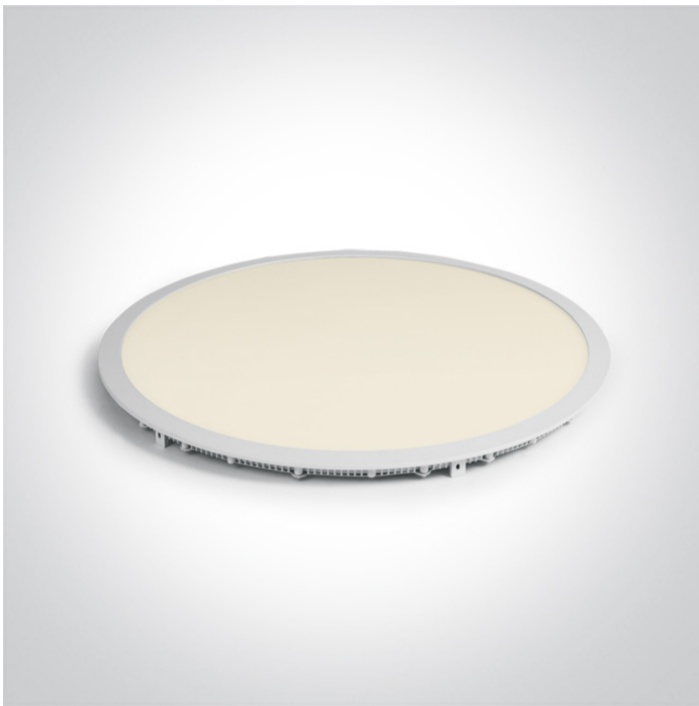


06 Downlights Fixed LED&gt;The 40-48W Round Recessed Panels Die Cast

**10148PE/W/W**

48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



Must be ordered separately



89048

## Related items



89048T



89050L



89050TLD

## Physical Specification


Item Group

06 Downlights Fixed LED

Family	The 40-48W Round Recessed Panel Downlight
Order Code	10148PE/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	20mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

### Electrical Characteristics

#### Fitting

Input Type	Constant Current
Input Current	1200mA
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

### Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm

Light Efficiency

72,91lm/W

Pobrano z mamadecor.pl

CRI

80

Beam Angle

120°

Illumination Diagram



#### Packing Info

Box Length

72cm

Box Width

65cm

Box Height

4,5cm

Box Weight

3,3Kg

Pcs/Carton

4

Barcode

5291889041863

HS Code

9405109890

#### Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

