

06 Downlights Fixed LED&gt;The Outdoor/Bathroom IP65 Range Die cast

**10150G/W/W**

50W LED recessed downlight, IP65. Suitable for Indoor/Outdoor installation.

Complete with 1200mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

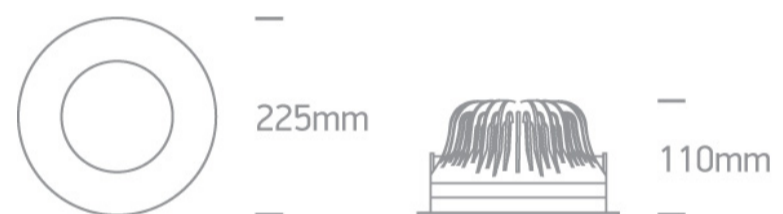

## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The Outdoor/Bathroom IP65 Range Die cast

Order Code

10150G/W/W

Colour

White

Material

Die Cast

Shape



Circular


Height



110mm

Diameter	225mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	200cm
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	37V
Safety Class	
Power(Watts)	44,4W
IP Rating	IP65
Light Source	LED built in

LED Type	COB
LED Brand	Cree
F Mark	
<b>Gear</b>	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	32,4-50,4W
Power Factor	0,9
Constant Current	Yes
1200mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu

**Illumination Data**

Colour Temperature	3000K
Lumen Output	4000lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	

**Packing Info**

Box Length	24,5cm
------------	--------

Box Width	24,5cm
Box Height	13cm
Box Weight	2kg
Pcs/Carton	4
Barcode	5291889051930
HS Code	9405409900

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

