

06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10140F/W/W

40W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 1000mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

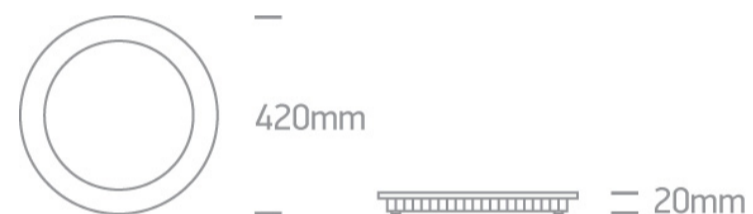

Gallery



Physical Specification

Item Group

06 Downlights Fixed LED

Family

The 40-48W Round Recessed Panels Die Cast

Order Code

10140F/W/W

Colour

White

Material

Die Cast

Diffuser Material



Acrylic


Shape

Circular

Height	20mm
Diameter	420mm
Cutout Hole Diameter	408mm
Recessed Ceiling	Yes
Depth Required	40mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2016

LED Brand

Epistar

Pobrano z mamadecor.pl

LED Number

300

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

34-38W

Power Factor

0,9

Constant Current

Yes

1000mA

34-38V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

40°C

Operating Temp

85°C

Housing Material

Plastic

Brand

Eaglerise

Protection

Open Circuit/Short Circuit

Illumination Data

Colour Temperature

3000K

Lumen Output

3400lm

Light Efficiency

85lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



Packing Info

Box Length	46cm
Box Width	46cm
Box Height	7cm
Box Weight	2,45Kg
Pcs/Carton	5
Barcode	5291889040651
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to
one light!

one
LIGHT

