

08 Downlights Adjustable LED>The COB Extractable Range

11110F/W/W



10W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

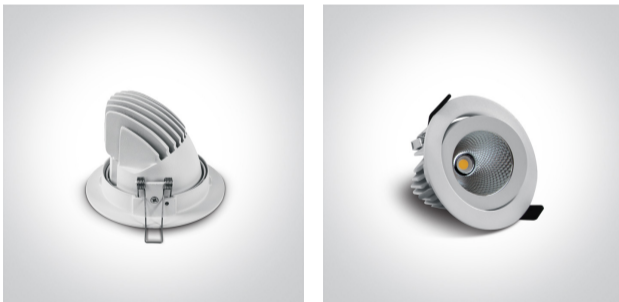

Physical Specification

Item Group

08 Downlights Adjustable LED

Family

The COB Extractable Range

Order Code

11110F/W/W

Colour

White

Material

Die Cast

Shape



Circular


Height

76mm

Diameter	108mm
Cutout Hole Diameter	90mm
Recessed Ceiling	Yes
Depth Required	105mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	37,3V
Safety Class	
Power(Watts)	7,5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

5,4-8,4W

Power Factor

0,9

Constant Current

Yes

200mA

27-42V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Brand

Eaglerise

Illumination Data

Colour Temperature

3000K

Lumen Output

770lm

Light Efficiency

77lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



Packing Info

Box Length

11,5cm

Box Width

11,5cm

Box Height

11cm

Box Weight

0,43kg

Pcs/Carton

36

Pobrano z mamadecor.pl


Barcode

5291889044857

HS Code

9405409900

Energy Label

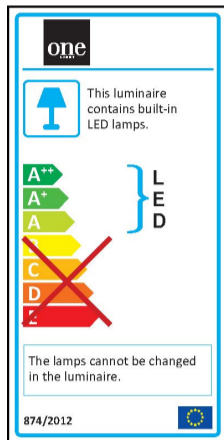

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

