


Product Datasheet

www.1-light.eu

New 2023 Edition 2>Downlights Adjustable LED

11115G/W/W

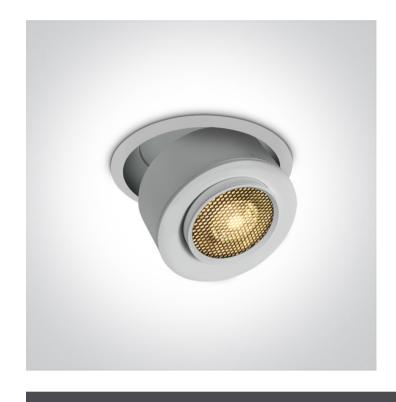

15W COB LED zoomable 15°-45° adjustable downlight with removable honeycomb.

Supplied with 350mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads







Dimensions

	105mm	- 1	
		ľ	47mm
Ì	80mm		

Gallery



Physical Specification

Item Group	New 2023 Edition 2
Family	Downlights Adjustable LED
Order Code	11115G/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	47mm

Cutout Hole Diameter	98mm				
Recessed Ceiling	Yes				
Depth Required	70mm				
Indoor	Yes				
Adjustable	2 Directions				
lectrical Characteristics					
Gear	External-Included				
Fitting + Driver					
Input Voltage	220-240V				
50 Hz	Yes				
60 Hz	Yes				
Safety Class					
Power(Watts)	15W				
IP Rating	IP20				
Light Source	LED built in				
Dimmable	No				
F Mark	F				
Fitting					
Input Type	Constant Current				
Input Current	350mA				
Voltage	41V				
Safety Class					
Power(Watts)	14,35W				
IP Rating	IP20				
Light Source	LED built in				
LED Type	СОВ				
LED Brand	Bridgelux				

105mm

Diameter

Pobrano z mamadecor.pl

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,45-14,7W
Power Factor	0,92
Constant Current	Yes
350mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	KGP
Protection	Short Circuit Protection, Overload Protection, No-load Protection
Illumination Data	
Colour Temperature	3000K
Lumen Output	1500lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	15°-45°
Illumination Diagram	T
Docking Info	
Packing Info	
Pcs/Carton	27
Barcode	5291889076469

Certification & Warranty

Warranty 5 years

switch to one light!

