


# **Product Datasheet**

www.1-light.eu

04 Recessed Spots Adjustable LED>The Interchangable Rings Range

11112H/B/W

# Aluminium

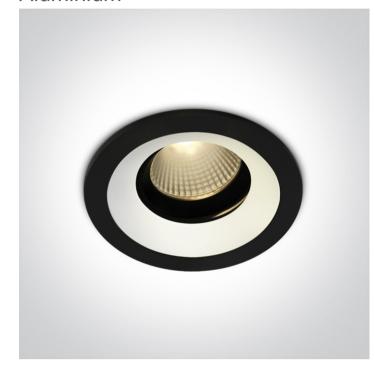

12W COB LED adjustable recessed spot with interchargeable rings.

Ring must be ordered separately.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.













### Downloads










### Dimensions



## Must be ordered separately







050086/BS



050086/G



050086/W



050086A/W

### **Physical Specification**

Item Group	04 Recessed Spots Adjustable LED
Family	The Interchangable Rings Range Aluminium
Order Code	11112H/B/W
Colour	Black
Material	Aluminium
Shape	Circular

Height	95mm	Pobrano z mamadecor.pl
Diameter	108mm	
Cutout Hole Diameter	90mm	
Recessed Ceiling	Yes	
Depth Required	120mm	
Indoor	Yes	
Adjustable	1 Direction	
Electrical Characteristics		
Gear	External-Included	
Fitting + Driver		
	400.0401/	
Input Voltage	100-240V	
50 Hz	Yes	
60 Hz	Yes	
Safety Class		
Power(Watts)	12W	
IP Rating	IP20	
Light Source	LED built in	
Dimmable	No	
F Mark	F	
Fitting		
Input Type	Constant Current	
Input Current	300mA	
Voltage	36V	
Safety Class		
Power(Watts)	10,8W	
IP Rating	IP20	
Light Source	LED built in	
LED Type	СОВ	

LED Brand	Cree Pobrano z mamadecor.pl
LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9-12W
Power Factor	0,9
Constant Current	Yes
300mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Brand	Eaglerise
Illumination Data	
Oalaus Taran anatura	200014
Colour Temperature	3000K
Lumen Output	940lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Packing Info	
Box Length	12cm
Box Width	12cm
Box Height	12cm

Box Weight	0,401Kg	Pobrano z mamadecor.pl
Pcs/Carton	30	
Barcode	5291889054078	
HS Code	9405409900	

# Certification & Warranty Warranty Weee Directive Yes



