

08 Downlights Adjustable LED&gt;The COB Pop Out Range Aluminium

11114R/W/W



14W LED adjustable COB Pop Out Range, IP20.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

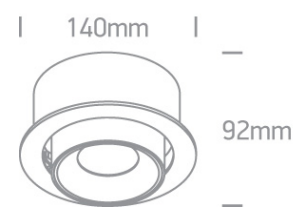

## Gallery



## Must be ordered separately



89015A



89015AT

## Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11114R/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	92mm
Diameter	140mm
Cutout Hole Diameter	130mm
Recessed Ceiling	Yes
Depth Required	85mm
Indoor	Yes
Adjustable	2 Directions

## Electrical Characteristics

## Fitting

Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	14W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Pobrano z mamadecor.pl

Cable Length

40cm

F Mark



## Illumination Data

Colour Temperature

3000K

Lumen Output

1037lm

Light Efficiency

74,07lm/W

CRI

80

Beam Angle

36°

Illumination Diagram



## Packing Info

Box Length

20cm

Box Width

20cm

Box Height

15cm

Box Weight

1,15Kg

Pcs/Carton

12


Barcode

5291889046950

HS Code

9405409900

## Energy Label

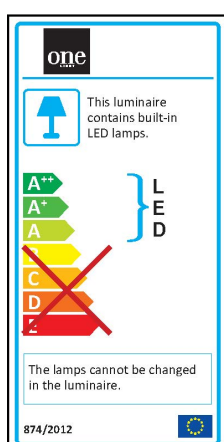

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

