

08 Downlights Adjustable LED>The COB Retro Downlights Aluminium

11115C/W/C



15W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

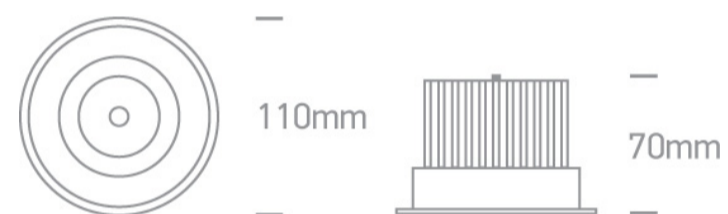

Gallery



Physical Specification

Item Group

08 Downlights Adjustable LED

Family

The COB Retro Downlights Aluminium

Order Code

11115C/W/C

Colour

White

Material

Aluminium

Shape



Circular

Height


70mm

Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	39V
Safety Class	
Power(Watts)	13,65W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

9,5-15W

Power Factor

0,9

Constant Current

Yes

350mA

27-42V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Brand

Lifud

Illumination Data

Colour Temperature

4000K

Lumen Output

1200lm

Light Efficiency

80lm/W

CRI

80

Beam Angle

38°

Illumination Diagram



Packing Info

Box Length

12,5cm

Box Width

12,5cm

Box Height

10cm

Box Weight

0,45kg

Pcs/Carton

30

Pobrano z mamadecor.pl


Barcode

5291889042235

HS Code

9405409900

Energy Label

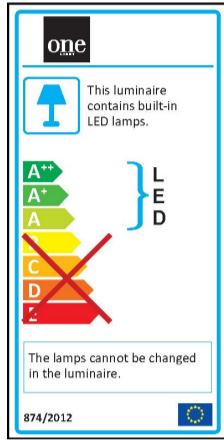

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

