

07 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11118H/G/C



18W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

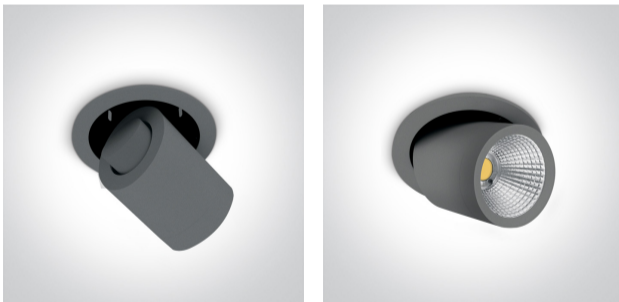

Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The COB Pop Out Range Aluminium

Order Code

11118H/G/C

Colour

Grey

Material

Aluminium

Shape



Circular

Height

126mm

Diameter	137mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	500mA
Voltage	35V
Safety Class	
Power(Watts)	17,5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

13-21W

Power Factor

0,9

Constant Current

Yes

500mA

35-45V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Brand

Lifud

Illumination Data

Colour Temperature

4000K

Lumen Output

1300lm

Light Efficiency

72,22lm/W

CRI

80

Beam Angle

35°

Illumination Diagram



Packing Info

Box Length

18,5cm

Box Width

18,5cm

Box Height

14cm

Box Weight

1,05kg

Pcs/Carton

20

Pobrano z mamadecor.pl

Barcode

5291889032601

HS Code

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

