

04 Recessed Spots Adjustable LED>The COB Round Spots Aluminium

11126V/AL/W



LED recessed trailing edge dimmable downlight .

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Physical Specification

Item Group

04 Recessed Spots Adjustable LED

Family

The COB Round Spots Aluminium

Order Code

11126V/AL/W

Colour

Aluminium

Material

Natural Aluminium

Shape



Circular


Height

125mm


Diameter	96mm
Cutout Hole Diameter	81mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	26W
IP Rating	IP20
Light Source	LED built in
Dimmable	Yes
Dimmer type	Trailing Edge
F Mark	

Fitting	
Input Type	Constant Current
IP Rating	IP20
Light Source	LED built in
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	26W
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable


Illumination Data

Colour Temperature	3000K
Lumen Output	1400lm
Light Efficiency	53,84lm/W
CRI	85
Beam Angle	50°
Illumination Diagram	

Packing Info

Pcs/Carton	32
Barcode	5291889031185
HS Code	9405409900

Energy Label

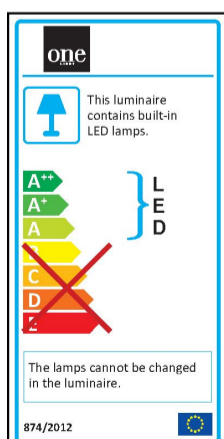

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

