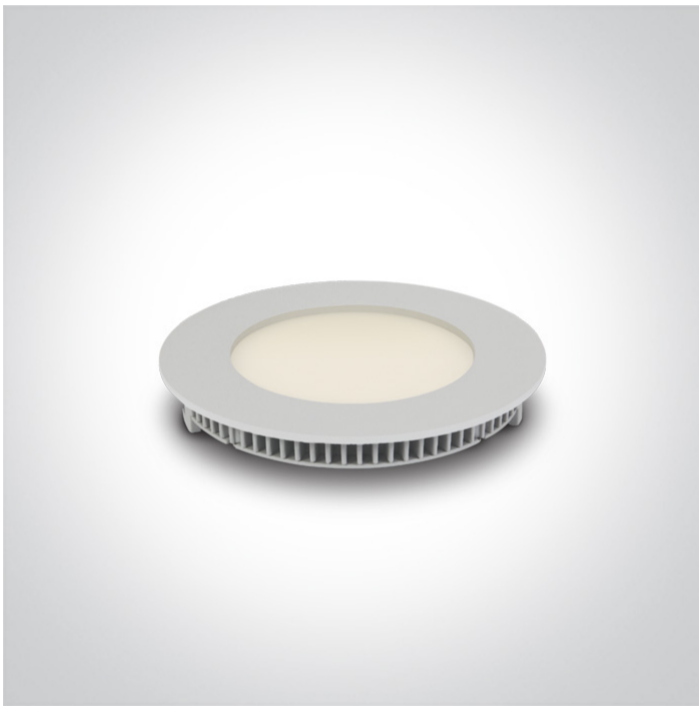


06 Downlights Fixed LED>The 3-12W Round Recessed Panels Die cast

10108FA/W/C

8W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

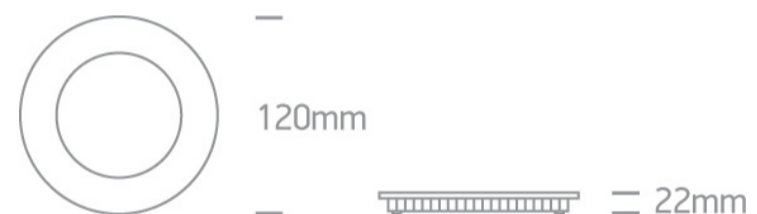

Gallery



Related items



89008UT

Physical Specification

Item Group



06 Downlights Fixed LED

Family

The 3-12W Round Recessed Panels Die cast

| | |
|----------------------|-------------|
| Order Code | 10108FA/W/C |
| Colour | White |
| Material | Die Cast |
| Diffuser Material | Acrylic |
| Shape | Circular |
| Height | 22mm |
| Diameter | 120mm |
| Cutout Hole Diameter | 108mm |
| Recessed Ceiling | Yes |
| Depth Required | 50mm |
| Indoor | Yes |
| Adjustable | No |

Electrical Characteristics

| | |
|------------------|---|
| Gear | External-Included |
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 8W |
| IP Rating | IP40 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 300mA |
| Voltage | 23V |



| | |
|--------------|--------------|
| Safety Class | III |
| Power(Watts) | 6,9W |
| IP Rating | IP40 |
| Light Source | LED built in |
| LED Type | SMD 2835 |
| LED Brand | Epistar |
| LED Number | 42 |

Gear

| | |
|------------------|------------|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 4,2-7,2W |
| Power Factor | 0,6 |
| Constant Current | Yes |
| Output | 300mA |
| Voltage Range | 14-24V |
| IP Rating | IP20 |
| Safety Class | |
| Dimmable | No |
| Ambient Temp | 50°C |
| Operating Temp | 75°C |
| Housing Material | Plastic |
| Brand | Lifud |

Illumination Data

| | |
|--------------------|--------|
| Colour Temperature | 4000K |
| Lumen Output | 560lm |
| Light Efficiency | 70lm/W |
| CRI | 80 |

Beam Angle

120°

Pobrano z mamadecor.pl

Illumination Diagram



Packing Info

Box Length

18,5cm

Box Width

3,1cm

Box Height

13cm

Box Weight

0,250Kg

Pcs/Carton

40

Barcode

5291889044055

HS Code

9405109890

Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to
one light!

one
LIGHT

