


Product Datasheet

www.1-light.eu

02 Recessed Spots Fixed LED>The 8W Range

10108R/B/W

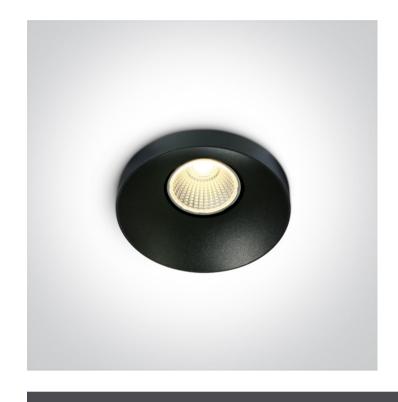

8W COB LED recessed Spot.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The 8W Range
Order Code	10108R/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	50mm
Diameter	81mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes

Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Type Input Current	Constant Current 350mA
Input Current	350mA
Input Current Voltage	350mA 20V
Input Current Voltage Safety Class	350mA 20V
Input Current Voltage Safety Class Power(Watts)	350mA 20V √111 7W
Input Current Voltage Safety Class Power(Watts) IP Rating	350mA 20V √III 7W IP20
Input Current Voltage Safety Class Power(Watts) IP Rating Light Source	350mA 20V III 7W IP20 LED built in
Input Current Voltage Safety Class Power(Watts) IP Rating Light Source LED Type	350mA 20V TIII 7W IP20 LED built in COB
Input Current Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand	350mA 20V III 7W IP20 LED built in COB Cree
Input Current Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand	350mA 20V TIT TW IP20 LED built in COB Cree
Input Current Voltage Safety Class Power(Watts) IP Rating Light Source LED Type LED Brand F Mark	350mA 20V TIT TW IP20 LED built in COB Cree

50 Hz	Yes Pobrano z mamadecor.pl
60 Hz	Yes
Power(Watts)	5-8,4W
Power Factor	0,9
Constant Current	Yes
350mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload
Illumination Data	
Colour Temperature	3000K
Lumen Output	560lm
Light Efficiency	70lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Packing Info	
Pcs/Carton	50
Barcode	5291889066101
HS Code	9405409900

Warranty	3 Years
Weee Directive	Yes

switch to one light!

