

## 02 Recessed Spots Fixed LED&gt;The COB IP54 Range

## 10113P/AL/W



15W COB LED recessed spot, IP54, for general lighting applications.

Suitable for bathroom installation.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

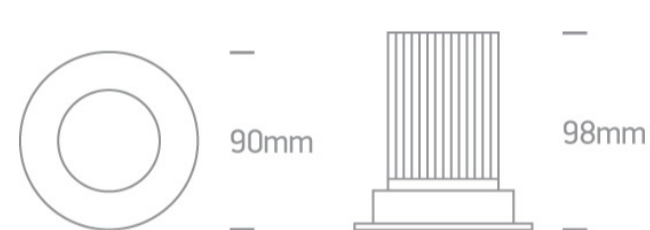

## Gallery






## Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Range
Order Code	10113P/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	98mm

Diameter	90mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	20,4V
Safety Class	
Power(Watts)	14W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand

Bridgelux

Pobrano z mamadecor.pl

LED Number

1

F Mark



## Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

10-19,5W

Power Factor

0,9

Constant Current

Yes

700mA

17-28V

IP Rating

IP20

Safety Class



Dimmable

No

Housing Material

Plastic

Brand

Eaglerise

Protection

0

## Illumination Data

Colour Temperature

3000K

Lumen Output

1000lm

Light Efficiency

66,67lm/W

CRI

80

Beam Angle

50°

Illumination Diagram



## Packing Info

Box Length

16cm

Box Width	13,5cm
Box Height	9,5cm
Box Weight	0,294kg
Pcs/Carton	30
Barcode	5291889032687
HS Code	9405409900

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

