

04 Recessed Spots Adjustable LED>The 7W COB Dark Light

11107FD/B/W



7W COB LED Adjustable Dark Light recessed spot IP20.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

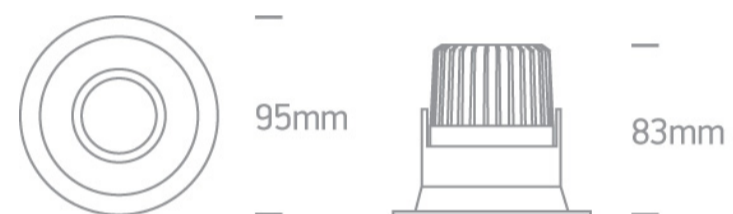

Physical Specification

| | |
|----------------------|----------------------------------|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The 7W COB Dark Light |
| Order Code | 11107FD/B/W |
| Colour | Black |
| Material | Die Cast |
| Shape | Circular |
| Height | 83mm |
| Diameter | 95mm |
| Cutout Hole Diameter | 80mm |
| Recessed Ceiling | Yes |
| Depth Required | 110mm |
| Indoor | Yes |

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

7W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

21V

Safety Class



Power(Watts)

6,2W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Epistar

LED Number

1


Gear

Gear Type

Led Driver

Input Voltage

220-240V

| | |
|------------------|---|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 4,2-7,2W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 300mA | 14-24V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Brand | Lifud |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 560lm |
| Light Efficiency | 80lm/W |
| CRI | 80 |
| Beam Angle | 60° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 11,5cm |
| Box Width | 10cm |
| Box Height | 11,5cm |
| Box Weight | 0,281Kg |
| Pcs/Carton | 50 |
| Barcode | 5291889052371 |
| HS Code | 9405409900 |

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

