

04 Recessed Spots Adjustable LED>The IP54 COB Outdoor/Bathroom
Range Die cast

11207WD/W/W



2x7W LED Dark Light Recessed adjustable spot, IP54.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

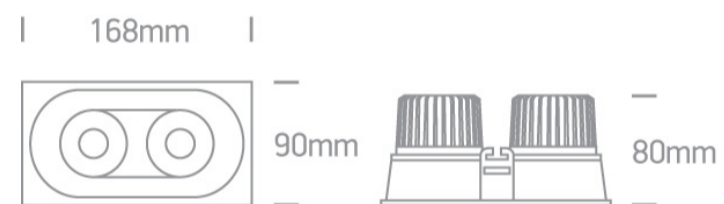

Gallery



Must be ordered separately



89015A




89015AT

Physical Specification


| | |
|--------------------|--|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The IP54 COB Outdoor/Bathroom Range Die cast |
| Order Code | 11207WD/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 168mm |
| Width | 90mm |
| Height | 83mm |
| Cutout Hole Width | 160mm |
| Cutout Hole Length | 83mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Safety Class | III |
| Power(Watts) | 2x7W |

| | |
|--------------|---|
| IP Rating | IP54 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Bridgelux |
| LED Number | 2 |
| Cable Length | 40cm |
| F Mark |  |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 2x600lm |
| Light Efficiency | 85,71lm/W |
| CRI | 90 |
| Beam Angle | 36° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 17,5cm |
| Box Width | 9,5cm |
| Box Height | 10cm |
| Box Weight | 0,520Kg |
| Pcs/Carton | 16 |
| Barcode | 5291889050704 |
| HS Code | 9405409900 |

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

