

06 Downlights Fixed LED&gt;The 8-16W Square Recessed Panels Die cast

**50108FA/W/W**

8W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

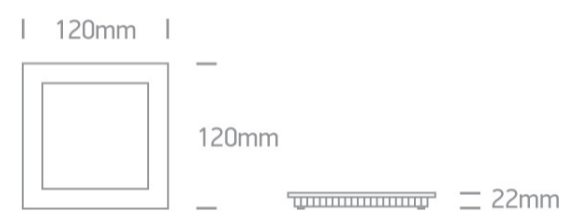

## Gallery



## Related items



89008UT

## Physical Specification

Item Group



06 Downlights Fixed LED

Family

The 8-16W Square Recessed Panels Die cast

Order Code	50108FA/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Rectangular
Length	120mm
Width	120mm
Height	22mm
Cutout Hole Width	105mm
Cutout Hole Length	105mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current

Input Current	300mA
Voltage	23V
Safety Class	
Power(Watts)	6,9W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	42

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,6
Constant Current	Yes
Output	300mA
Voltage Range	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

## Illumination Data

Colour Temperature	3000K
Lumen Output	480lm

Light Efficiency

60lm/W

Pobrano z mamadecor.pl

CRI

80

Beam Angle

120°

Illumination Diagram



#### Packing Info

Box Length

18,5cm

Box Width

3,1cm

Box Height

13cm

Box Weight

0,26Kg

Pcs/Carton

40

Barcode

5291889044246

HS Code

9405109890

#### Certification & Warranty

Warranty

2 Years

Average Lifetime

30000 hours

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

