

06 Downlights Fixed LED>Square IP65 Panels Aluminium

50140AW/W/C



62x62 IP65 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

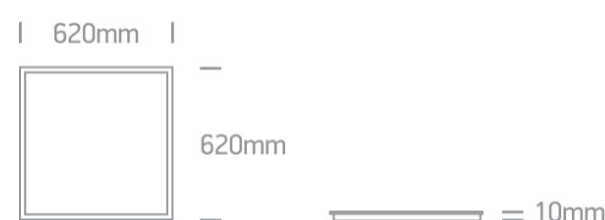

Accessories



050017




050108

Related items



89050L



89050TLD



Physical Specification

Item Group


06 Downlights Fixed LED

Family	Square IP65 Panels Aluminium Pobrano z mamadecor.pl
Order Code	50140AW/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	620mm
Width	620mm
Height	10mm
Recessed T-Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	1000mA

Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30-40W
Power Factor	0,9
Constant Current	Yes
1000mA	30-40V
IP Rating	IP65
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	BOKE


Illumination Data

Colour Temperature	4000K
Lumen Output	3200lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	4,3Kg
Pcs/Carton	4
Barcode	5291889043973
HS Code	9405109890

Energy Label

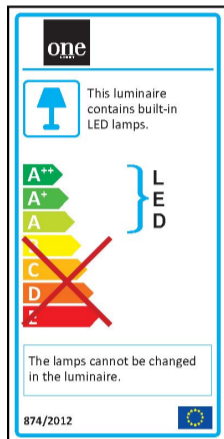

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

