

06 Downlights Fixed LED&gt;Square UGR17 &amp; UGR19 Office Panels Aluminium

**50140U/W/C**

60x60 UGR 17 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Accessories



050017

## Related items



89050L



89050TLD



## Physical Specification

Item Group

06 Downlights Fixed LED

Family	Square UGR17 & UGR19 Office Panel
Order Code	50140U/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	595mm
Width	595mm
Height	10mm
Recessed T-Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	36V



Safety Class	III
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Sanan

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-42W
Power Factor	0,9
Constant Current	Yes
1000mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	No-Load, Short Circuit

## Illumination Data

Colour Temperature	4000K
Lumen Output	3400lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	120°



UGR

17

## Packing Info

Box Weight

2,4Kg

Pcs/Carton

6


Barcode

5291889054894

HS Code

9405109890

## Energy Label

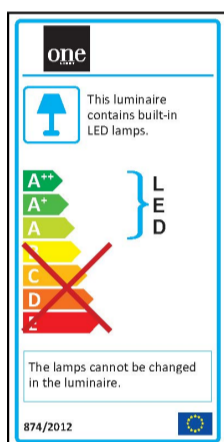

## Certification &amp; Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

