

08 Strips & Profiles > 24V Linkable Modules Aluminium

38001A/RGB



1W LED Linkable module, IP20 .

Requires 24V DC constant voltage LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

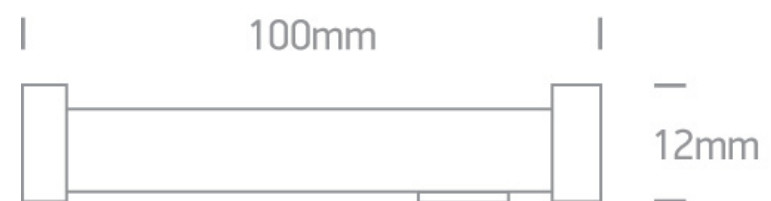

Accessories



38006C



38006C



38007C



38007C

Physical Specification

Item Group

08 Strips & Profiles

Family

24V Linkable Modules Aluminium

Order Code

38001A/RGB

Material

Aluminium

Shape

Rectangular



Length

100mm


| | |
|-----------------|------|
| Width | 12mm |
| Height | 5m |
| Surface Ceiling | Yes |
| Surface Wall | Yes |
| Indoor | Yes |

Electrical Characteristics

Fitting

| | |
|---------------|---|
| Input Type | Constant Voltage |
| Input Voltage | 24V DC |
| Safety Class |  |
| Power(Watts) | 1W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | SMD |
| F Mark |  |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | RGB |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Pcs/Carton | 100 |
| Barcode | 5291889019121 |
| HS Code | 9405104090 |

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

