


Product Datasheet

www.1-light.eu

07 Downlights Adjustable LED>The COB Square Downlights Die cast

51109B/W/W

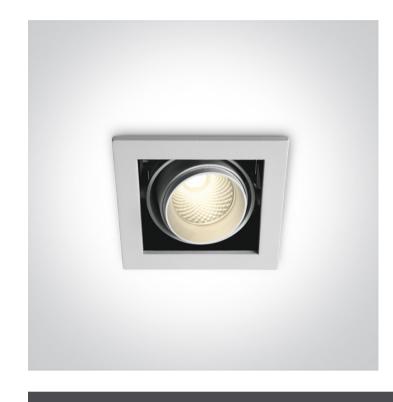

10W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery



Physical Specification

| Item Group | 07 Downlights Adjustable LED |
|------------|------------------------------------|
| Family | The COB Square Downlights Die cast |
| Order Code | 51109B/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Rectangular |
| Length | 107mm |

| Width | 107mm | Pobrano z mamadecor.pl |
|----------------------------|-------------------|------------------------|
| Height | 98mm | |
| Cutout Hole Width | 90mm | |
| Cutout Hole Length | 90mm | |
| Recessed Ceiling | Yes | |
| Depth Required | 120mm | |
| Indoor | Yes | |
| Adjustable | 2 Directions | |
| | | |
| Electrical Characteristics | | |
| | F | |
| Gear | External-Included | |
| Fitting + Driver | | |
| | | |
| Input Voltage | 220-240V | |
| 50 Hz | Yes | |
| 60 Hz | Yes | |
| Safety Class | 4004 | |
| Power(Watts) | 10W | |
| IP Rating | IP20 | |
| Light Source | LED built in | |
| F Mark | F | |
| Fitting | | |
| | | |
| Input Type | Constant Current | |
| Input Current | 200mA | |
| Voltage | 37,3V | |
| Safety Class | | |
| Power(Watts) | 7,46W | |
| IP Rating | IP20 | |
| Light Source | LED built in | |
| LED Type | COB | |
| | | |

| Gear | |
|---|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 5,5-8,4W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 200mA | 27-42V |
| IP Rating | IP20 |
| Safety Class | |
| Housing Material | Plastic |
| | |
| | |
| Illumination Data | |
| Illumination Data | |
| Illumination Data Colour Temperature | 3000K |
| | 3000K 700lm |
| Colour Temperature | |
| Colour Temperature Lumen Output | 700lm |
| Colour Temperature Lumen Output Light Efficiency | 700lm 70lm/W |
| Colour Temperature Lumen Output Light Efficiency CRI | 700lm 70lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle | 700lm 70lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 700lm 70lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 700lm 70lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle | 700lm 70lm/W 80 |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 700lm 70lm/W 80 36° |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Weight | 700lm 70lm/W 80 36° \tilde{\tilie{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde{\tilde |
| Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Weight Pcs/Carton | 700lm 70lm/W 80 36° 0,57kg 27 |

| Warranty | 3 Years |
|----------------|---------|
| Weee Directive | Yes |

switch to one light!

