

08 Downlights Adjustable LED>The COB Semi Trimless Square

51120TR/W/W



20W COB LED Recessed Adjustable downlight, semi trimless, IP20.

Complete 700mA driver.


Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions

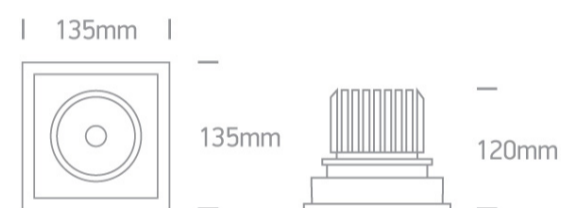

Gallery



Physical Specification

Item Group

08 Downlights Adjustable LED

Family

The COB Semi Trimless Square

Order Code

51120TR/W/W

Colour

White

Material

Die Cast

Shape


Rectangular

Length

135mm

| | |
|--------------------|--------------|
| Width | 135mm |
| Height | 120mm |
| Cutout Hole Width | 120mm |
| Cutout Hole Length | 120mm |
| Recessed Ceiling | Yes |
| Depth Required | 150mm |
| Indoor | Yes |
| Adjustable | 2 Directions |

Electrical Characteristics

| | |
|------------------|---|
| Gear | External-Included |
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 20W |
| IP Rating | IP20 |
| Light Source | LED built in |
| Dimmable | No |

| | |
|---------------|---|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 28V |
| Safety Class |  |
| Power(Watts) | 19,6W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |

LED Brand

Bridgelux

Pobrano z mamadecor.pl

LED Number

1

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

12,6-21W

Power Factor

0,9

Constant Current

Yes

700mA

18-30V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Connector

Brand

Eaglerise

Protection

0

Illumination Data

Colour Temperature

3000K

Lumen Output

1500lm

Light Efficiency

75lm/W

CRI

80

Beam Angle


36°

Illumination Diagram



| | |
|------------|---------------|
| Box Weight | 0,94Kg |
| Pcs/Carton | 12 |
| Barcode | 5291889044673 |
| HS Code | 9405409900 |

Energy Label

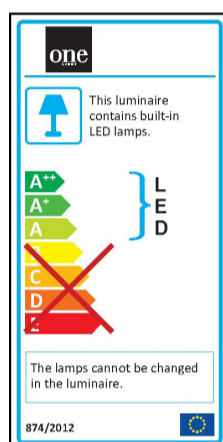

Certification & Warranty

Warranty

3 Years

switch to
one light!

one
LIGHT

