


Product Datasheet

www.1-light.eu

07 Downlights Adjustable LED>The Box Type Shop Range

51140/B/C

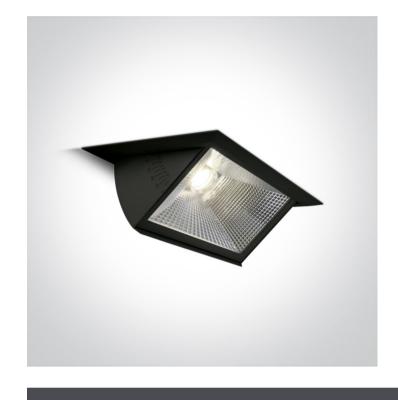

40W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads









Dimensions



Physical Specification

Item Group	07 Downlights Adjustable LED
Family	The Box Type Shop Range
Order Code	51140/B/C
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	235mm
Width	145mm
Height	110mm
Cutout Hole Width	220mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes

Depth Required	140mm	Pobrano z mamadecor.
Indoor	Yes	
Adjustable	1 Direction	
ectrical Characteristics		
Gear	External-Included	
Fitting + Driver		
Input Voltage	220-240V	
50 Hz	Yes	
60 Hz	Yes	
Safety Class		
Power(Watts)	40W	
IP Rating	IP20	
Light Source	LED built in	
Dimmable	No	
F Mark	F	
Fitting		
Input Type	Constant Current	
Input Current	1050mA	
Voltage	35V	
Safety Class	<u> </u>	
Power(Watts)	37W	
IP Rating	IP20	
Light Source	LED built in	
LED Type	СОВ	
LED Brand	Sanan	
Gear		
Gear Type	Led Driver	

Input Voltage	220-240V Pobrano z mai	madecor.pl
50 Hz	Yes	
60 Hz	Yes	
Power(Watts)	34,65-42W	
Power Factor	0,9	
Constant Current	Yes	
1050mA	33-40V	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Housing Material	Plastic	
Brand	Lifud	
Ilumination Data		
Calaur Taran anatura	40001/	
Colour Temperature	4000K	
Lumen Output	3500lm	
Light Efficiency	87,5lm/W	
CRI	80	
Beam Angle	70°	
Illumination Diagram		
Packing Info		
Pcs/Carton	9	
Barcode	5291889061465	
HS Code	9405409900	

Warranty	2 Years
Weee Directive	Yes



