


Product Datasheet

www.1-light.eu

06 Downlights Fixed LED>Surface/Recessed Panels Adjustable Cut Out Hole

62116FA/W/C

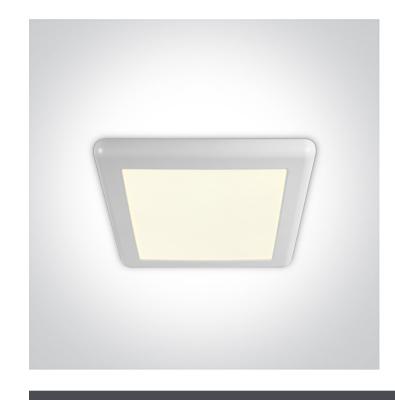

16W Downlight LED, IP20

Complete with 230mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions

I 235x235mm I



_ 17mm

Physical Specification

Item Group	06 Downlights Fixed LED
Family	Surface/Recessed Panels Adjustable Cut Out Hole
Order Code	62116FA/W/C
Colour	White
Material	Plastic
Shape	Rectangular
Length	235mm
Width	235mm
Height	17mm
Cutout Hole Diameter	70mm-190mm
Recessed Ceiling	Yes
Depth Required	50mm

Indoor	Yes Pobrano z mamadecor.p
Adjustable	No
ectrical Characteristics	
0.5.5.1	D. dit in
Gear	Built In
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	16W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	230mA
Voltage	68V
Power(Watts)	15,6W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes


60 Hz	Yes	Pobrano z mamadecor.pl
Power(Watts)	16W	
Power Factor	0,5	
Constant Current	Yes	
Output	230mA	
IP Rating	IP20	
Safety Class		
Dimmable	No	
Output Terminal	Cable	

Illumination Data

Colour Temperature	4000K
Lumen Output	1500lm
Light Efficiency	93,75lm/W
CRI	80
Illumination Diagram	

Packing Info Pcs/Carton 20 Barcode 5291889067771 HS Code 9405104090

Energy Label



Warranty	2 Years
Weee Directive	Yes



