


# INSTALLATION MANUAL

## 61092

**LED**  
BUILT IN








2,5W | IP65 | SMD LED | CCT Adjustable | Dimmable | Die cast


 Rechargeable USB socket.  
2x4400mAh lithium battery.

**80**  
CRI

**A**

### CHARGE

 Order separately  
USB adaptor  
**61000A**  
or charging  
station **61000**


 100% → 0%  
10 hours  
(100% light intensity)

 MAX 6.5 HOURS  
(full recharging)



**B**

### TOUCH SWITCH & MEMORY of BRIGHTNESS

 Each time the table lamp  
is switched ON, the lighting  
brightness remains the same  
as in previous setting.






TOUCH STEPLESS DIMMER

Only works when the light is ON

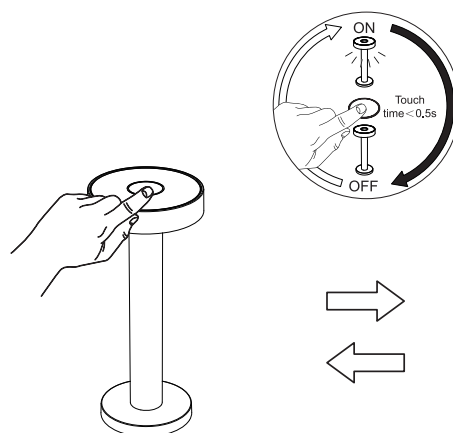
**C**

### CCT ADJUSTABLE

Only works when the light is OFF

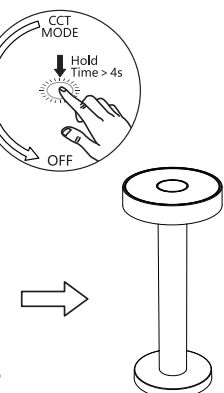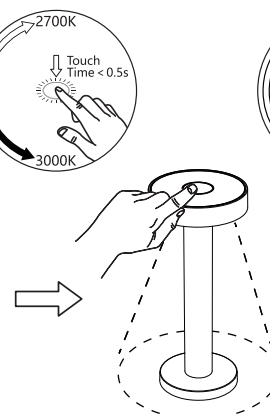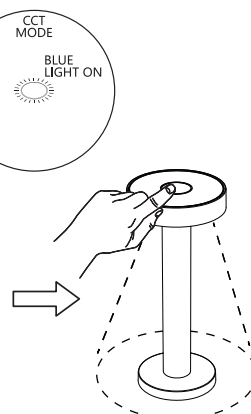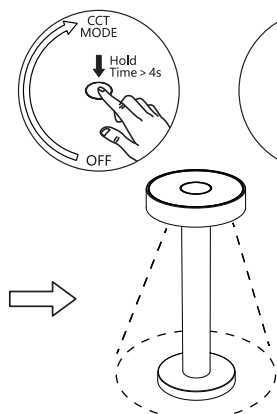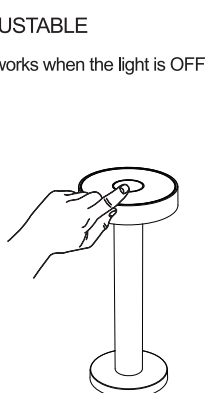

\*The charging base is IP20

### Warnings:

1. Do not cover the fitting.
2. The batteries should not be opened, destroyed or incinerate.
3. Do not short circuit terminals, or over charge the battery, forced over-discharge, throw to fire.
4. Do not crush or puncture the battery, or immerse in liquids.
5. Avoid direct sunlight.
6. Storage preferably in cool, dry and ventilated area, which is subject to little temperature change.
7. Do not place the battery near heating equipment, nor expose to direct sunlight for long periods.