


## **Product Datasheet**

www.1-light.eu

## 14 Plafo>Decorative Plafo

## 62182A/BBR/W

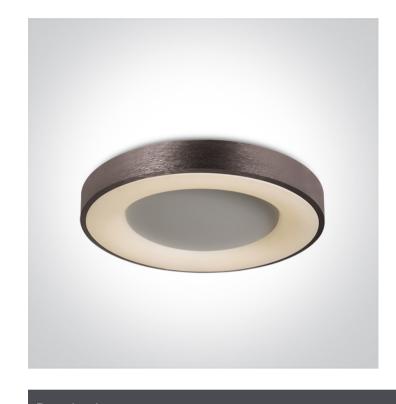

50W LED Decorative Plafo, IP20, suitable for residential and commercial application.

Complete with 1300mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



## Physical Specification

Item Group	14 Plafo
Family	Decorative Plafo
Order Code	62182A/BBR/W
Colour	Brushed Brown
Material	Aluminium
Shape	Circular
Height	87mm
Diameter	600mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	1300mA
Voltage	37V
Voltage Power(Watts)	37V 48,1W
Power(Watts)	48,1W
Power(Watts)  IP Rating	48,1W IP20
Power(Watts)  IP Rating  Light Source	48,1W IP20 LED built in
Power(Watts)  IP Rating  Light Source  LED Type	48,1W IP20 LED built in SMD 2835
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand	48,1W  IP20  LED built in  SMD 2835  Bridgelux
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand	48,1W  IP20  LED built in  SMD 2835  Bridgelux
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  F Mark	48,1W  IP20  LED built in  SMD 2835  Bridgelux
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  F Mark  Gear	IP20 LED built in SMD 2835 Bridgelux
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  F Mark  Gear  Gear Type	48,1W  IP20  LED built in  SMD 2835  Bridgelux  F
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  F Mark  Gear  Gear  Input Voltage	48,1W IP20 LED built in SMD 2835 Bridgelux  F  Led Driver 220-240V
Power(Watts)  IP Rating  Light Source  LED Type  LED Brand  F Mark  Gear  Gear  John Source  Joh	48,1W  IP20  LED built in  SMD 2835  Bridgelux  F  Led Driver  220-240V  Yes

Power Factor	0,9 Pobrano z mamadecor.pl
Constant Current	Yes
1300mA	33-46V
IP Rating	IP20
Safety Class	
Dimmable	No
Output Terminal	Cable
Brand	Kegu
Illumination Data	
Colour Temperature	3000K
Lumen Output	4250lm
Light Efficiency	85lm/W
CRI	80
Illumination Diagram	
Packing Info	
racking into	
Box Weight	5.700kg
Pcs/Carton	1
Barcode	5291889066002
HS Code	9405409900

Certification & Warranty

Yes

Weee Directive

switch to one light!

